


Manufacturer's Agents to the Middle East & South East Asia

SPRING/ SUMMER 2016



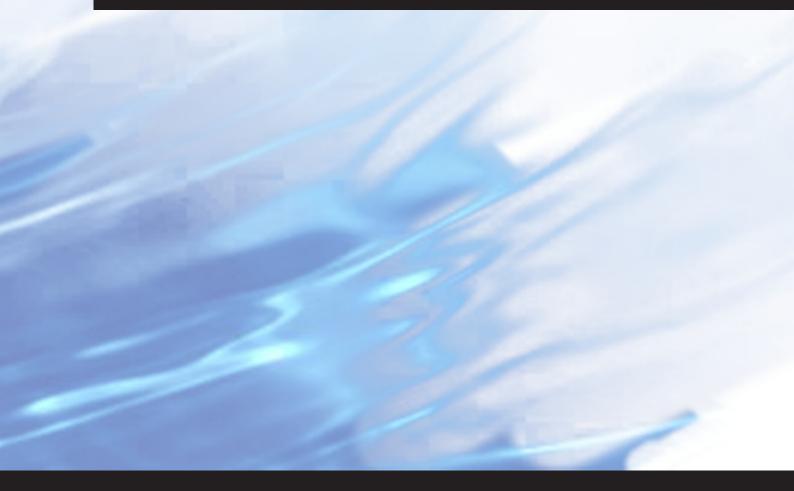


# Contents

- 3. Company Overview
- 4. AGS
- 6. Heldite/Kommerling
- 7. Horobin
- 17. Monument Tools
- 35. Backer
- 36. McApline
- 76. Celmac
- 85. Rastelli
- 93. TNJ
- 97. George Lancaster



# Company Overview



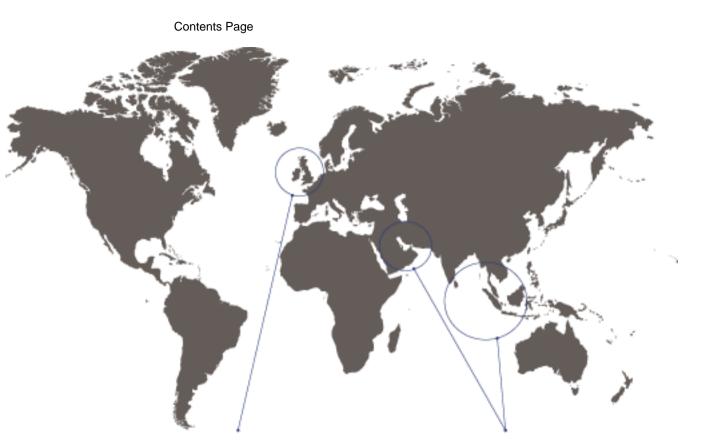

# UK Manufacturing

All our products originate from established British manufacturing companies, producing the highest quality of goods.

# Where we Operate

We cover the Middle East, Sri Lanka and South East Asia.

W GREER LTD HAS BEEN MANUFACTURING, REPRESENTING AND DISTRIBUTING UK AND EUROPEAN MADE PRODUCTS TO THE MIDDLE EAST AND SOUTH EAST ASIA FOR THE LAST 50 YEARS.

This brochure details some of the more popular products on offer through W Greer Ltd. However, we manufacture, represent and distribute a wider range of products for all types of engineering and retail. For more details contact enquiries@wgreerltd.co.uk and we will be happy to as sist with your requirements all the way through to delivery.





# Andrew Greer & Sons (AGS) Ltd

Andrew Greer & Sons (AGS) is a leading producer of high quality anti-corrosion pipe-wrap from the UK. AGS also produce other products such as leaded and unleaded solder wire to the highest standard.

AGSSLDO2 AGS SOLDER WIRE CAPILLARY 3MM



AGSSLD01 AGS LEAD FREE SOLDER WIRE 3MM



# AGSFLUX AGS FLUXPASTE

AGS Fluxpaste is a self cleaning Soldering flux used for capillary joints on copper pipework, brass and mild steel.

AGS Fluxpaste is UK WRAS listed for both hot & cold water including potable water.



AGS PTFE THREAD SEAL Tape Conforms to BS7786

12mm or 25mm width. 10m or 12m in length.









An anti-corrosive non-cellulose waterproof membrane based on refined petroleum condensates with added inhibitors and moisture displacement agents. The carrier is a strong non degradable flexi-tape allowing accurate contour contact with virtual elimination of air pockets and loose wrap and ensuring excellent jointseal at overlaps. 'AGS' GREASY PIPEWRAP INSULATING TAPE has been approved and is used by Electricity and Gas Authorities.

Related products to be used in conjuntion with AGS Greasy Pipewrap are:

# **AGS PRIMER**

A single pack coating based on a bituminous wax blend, intended to protect steel surfaces against corrosion. AGS GREASY WRAPPER TAPE PRIMER can be applied by brush, roller or spray prior to the application of AGS GREASY WRAPPER TAPE.

#### AGS GREASY MASTIC BLANKET

Anti-corrosive cold applied preformed layer of petroleum condensates with added inhibitors and moisture displacement agents. Containing inert siliceous fillers and cellulose fibres. This mastic is backed with a polyester fabric fully impregnated with a petrolatum compound. AGS GREASY MASTIC BLANKETS has been approved and is used by Electricity and Gas Authorities.

Additional protection can be obtained by overcoating with AGS GREASY WRAPPER TAPE.

For more information on any of these products, please email: enquiries@greer-exporting.co.uk 250mm 8 blankets per carton Packaging

300mm 8 blankets per carton 450mm 4 blankets per carton 500mm 4 blankets per carton 600mm 4 blankets per carton

# AGS GREASY PASTE

A soft mouldable blend of petrolatum and inert fillers containing anti-corrosive inhibitors and moisture displacement agents. AGS GREASY PASTE has been approved and is used by Electricity and Gas Authorities. Packaging 20 litre drums and 5 litre pails.

AGS also supply a cold applied Bitumen PVC Overwrap complete with release paper.







AGS is a market leader in the supply of UK manufactured high quality welded stainless steel tubes.

AGS supply tube worldwide and prides itself on being unique in its ability to offer a range of products and services unrivalled by our competition. This together with our commitment to customer service and satisfaction demonstrates our desire to be the market leader within our field.











MANUFACTURING SPECIFICATIONS Tubes manufactured in accordance with BS EN 10296-2:2005 BS EN 10217-7:2005 BS EN 10312: 2002 ASTM A249 ASTM A269

**ASTM 554** 

Tube EN10312 1.4301 (304)

SST 15 - 15mm OD x 0.6mm wt x5800mm SST 22 - 22mm OD x 0.7mm wt x5800mm SST 28 - 28mm OD x 0.8mm wt x5800mm

Other dimensions, grades, specifications and finishes available on request





# "HELDITE" Jointing Compound







Kommerling Industrial Sealants & Adhesives
Kommerling UK Ltd is a subsidiary of Adco Global Inc, an international
group of Companies in strategic locations around the world. It has over
100 years experience in the development, manufacture and distribution of
high quality adhesives and sealants for a variety of applications, including
Glass, Solar / Photovoltaic, Transportation and General Industrial.

Stag brand Jointing Compounds are manufactured to specific industry standards and are easy release, lead free jointing compounds of smooth consistency for use on flanged or screw threaded joints. These products meet the relevant industry standards for use on pipework carrying water (including potable water), brine, steam, gas (including liquefied and natural gas), fuel oil, diesel oil, petrol or compressed air.

The range includes:

Stag A & B
Stag White and Stag White Universal
Plasti-Coll X10 and Plasti-Coll X10G
Wellseal







# Steel Test Plugs



- > Available from 40mm up to 450mm diameter.
- Chemical resistant Seals can be supplied to order.
- "Double Seal" plugs can be supplied to order.
- > Thrustwashers fitted as standard on all sizes.
- Zinc plated corrosion resistant to 90 hours salt spray test.
- Combines the economy of price with the strength of steel.
- > Carries the Horobin name quality quaranteed.
- > Nominal pipe sizes, minimum and maximum pipe diameters each Plug will fit, maximum test pressure, and weight of Plug are available on our Web Site.

# **Aluminium Test Plugs**



- Available from 40mm up to 900mm diameter.
- > Aluminium plates combine strength with lightness.
- > Thrustwashers fitted as standard on all sizes.
- Chemical resistant Seals can be supplied to order.
- "Double Seal" plugs can be supplied to order.
- Steel components are zinc plated to 90 hours salt spray test.
- Carries the Horobin name quality guaranteed.
- Nominal pipe sizes, minimum and maximum pipe diameters each Plug will fit, maximum test pressure, and weight of Plug are available on our Web Site.







# **Super Nylon Testing Plugs**



- > Available from 18mm up to 150mm diameter.
- Superior design easier to use.
- Can be used for testing up to 7p.s.i.
- Designed to fit Telecommunication Ducts for temporary sealing to prevent ingress of vermin and sand.
- Easy to sterilise so can be used in Hospitals, Food Processing Plants etc.
- Carries the Horobin name quality guaranteed.
- > Nominal pipe sizes, minimum and maximum pipe diameters each Plug will fit, maximum test pressure, and weight of Plug are available on our Web Site.

# End of Pipe Testing/Sealing Plugs



- For temporary sealing of new pipework on construction sites.
- Easier to use than traditional Test Plugs fit flush onto the end of the pipe.
- Available from 50mm up to 250mm diameter.
- Can be supplied with or without a Waterway/Airway.
- ➤ Zinc plated corrosion resistant to 90 hours salt spray test.
- Carries the Horobin name quality guaranteed.
- Nominal pipe sizes, minimum and maximum pipe diameters each Plug will fit, maximum test pressure, and weight of Plug are available on our Web Site.



# MDPE/HDPE Test Plugs for Pressure Testing to 6bar



- Available for Pipe Sizes from 25mm up to 75mm outside diameter.
- > For use with small bore copper, steel or MDPE/HDPE piping.
- Suitable for Pressure Testing up to 6bar.
- Suitable also for telecommunications, refrigeration, air conditioning, heating, process plant and food manufacturing.
- "Double Seal" plugs can be supplied to order.
- Steel components are zinc plated to 90 hours salt spray test.
- Carries the Horobin name quality guaranteed.
- > Nominal pipe sizes, minimum and maximum pipe diameters each Plug will fit, maximum

# Steel Test Plugs (Type 920) Pneumatic Seals



- Multiple compression points around the perimeter of the plug enable the seal to expand in localised areas.
- Strength where it matters at the compression point.
- Steel components are painted against corrosion.
- > The Plugs are fitted with handle bars, to make it easier to locate the plug in the pipe.
- ➤ Can be supplied with twin outlets lower outlet allows complete emptying of water from the drain before removal of the plug.
- Chemical resistant Seals can be supplied to order.
- "Double Seal" plugs supplied as standard.





# Multi-lock Steel Test Plugs 450mm to 3000mm



- Multiple compression points around the perimeter of the plug enable the seal to expand in localised areas.
- Strength where it matters at the compression point.
- > Steel components are aluminium coated against corrosion.
- > The Plugs are fitted with handle bars, to make it easier to locate the plug in the pipe.
- > Can be supplied with twin outlets lower outlet allows complete emptying of water from the drain before removal of the plug.
- > Chemical resistant Seals can be supplied to order.
- > "Double Seal" plugs can be supplied to order.
- > "Instructions for use" label on each plug.
- > Nominal pipe sizes, minimum and maximum pipe diameters each Plug will fit, maximum



- ➤ Ideal for use in all types of Plastic Pipe the ridges around the circumference of the Bag prevent the Bag slipping down the pipe. Also designed for use in vertical Soil Stacks.
- Range available for pipe diameters from 25mm to 450mm.
- Easily inflated for trouble free pipe sealing and testing.
- Ideal for use in areas where access is smaller than the test diameter.
- > Extension hose available to facilitate remote sealing and testing.
- Nominal pipe sizes, minimum and maximum pipe diameters each Bag will fit, maximum test pressure, and weight of Bag are available on our Web Site.







# Canvas Inflatable Air Bags



- The answer to a variety of pipe sealing problems in all Industries from Sewerage, Petrochemicals, Food Processing, Mining etc.
- The Cover is available in Canvas, Heavy Duty Nylon, or Polyurethane coated to resist Petrol, Oil and Diesel.
- Range available for pipe diameters from 50mm to 4,000mm.
- ▶ Ideal for use in areas where access is smaller than the test diameter. Can also be supplied with the Inflation Tube in the centre to block off either side of a T.
- Easily inflated for trouble free pipe sealing.
- Fitted either with a Schrader Valve, or Brass Air Tap. Larger sizes fitted with Ball Valve for inflating using a compressor.
- Can be fitted with a Pressure Gauge to prevent over inflation.
- Extension hose available to facilitate remote sealing.
- Nominal pipe sizes, minimum and maximum pipe diameters each Bag will fit, maximum

# A.T.O. Inflatable Pipe Stoppers for Air Testing of Sewers



All A.T.O. Inflatable Pipe Stoppers have test and blank ends.

5<sub>mm</sub> thick closed-cell foam sealing surface.

Car type valve for inflation.

Pull tag for deflation.

No removable parts.

Hook and loop strap to attach U Gauge.

PATENT NO.GB2361283 TRADE MARK NO.2299965

Position/pull out handle on 600<sub>mm</sub> and above.

Nominal bore + or - 6<sub>mm</sub>.

Size range from 300mm/12" to 1800mm/70".

Manufactured and tested to BSI standard.









# High Pressure Inflatable Pipe Stoppers



- Maximum Allowable Back Pressure 3.0 bar (30m head water) \*\*
- Maximum Inflation pressure 6.0 bar\*\*
- Wide expansion range will work in all types of pipe 100mm up to 2,000mm
- · Lightweight, most sizes can be installed by one man
- Reinforced Synthetic Rubber for maximum durability
- Available in Nitrile for Hydrocarbon applications
- · Compressor inflation controller
- · Specials sizes on request

# Socket Testing Devices for Pressure Testing Sockets in Concrete Pipes




- Enables each individual Socket to be precisely tested. Dramatically reduces the amount of water required.
- Can be supplied in up to 3 sections for Sewers with limited access.
- Suitable for pressure testing drains and sewers to BS.8005 and EN1610.
- > Fitted with Wheels so the Device can be easily pushed up the Sewer.
- Superior design and quality ensures ease of use.
- Extension Hoses allow for remote testing.
- We can supply portable Compressors and associated equipment.
- Horobin guaranteed quality.







# Drain Testing Kits for carrying out Air Pressure Test to BS.8005/EN1610

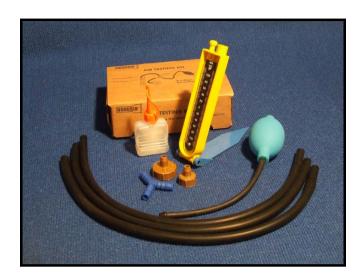

- The complete answer for pressure testing drains and sewers of any diameter.
- ► HOROBIN<sub>TM</sub> "Drain test Kit" is the only complete kit on the market for pressure testing 100mm drains.
- ➤ Suitable for pressure testing drains and sewers to BS.8005 and EN1610.
- Superior design and quality ensures ease of use.
- High visual impact for "Point of Sale" display.
- Horobin guaranteed quality.

# Pipe and Drain Tracing Dye



- ➤ Tracing Dyes are supplied in 200gram Poly-jars in a range of 6 colours GREEN FLUORESCEINE, RED, BLUE, ORANGE, YELLOW & VIOLET .
- Tracing Dye is used for detecting the flow of water in drains or pipes, identifying individual drain runs into a common gully, and tracing leaks in pipes.
- Dyes are non-toxic and odourless. They are approved by the National rivers Authorities, Water Companies and Local Authorities.
- Green Dye contains 50% Fluorescence. The other colours are made from 100% food grade products.
- ➤ Use 5ml of Dye per 10 litres of cold water. The best method is to mix the Dye into a bucket of water, and then add to the flow of drain. A 200gram jar will trace up to 15,000 litres in chemical free water.

**NEW!** We now have a Tracing Dye which is safe to use with Fish. This Dye can be used to trace leakages from Drains, Sewers, Ponds, Reservoirs etc. Sold in 5 kilo drums, which will trace up to 0.5 million litres of fresh water. Mix 500 grams with 10 litres of clean Water.





# High Pressure Testing Plug - 6bar+



- For Pressure Testing and Temporary Sealing of Water, Gas, Oil and Sewerage Pipes of any material.
- ➢ Ideal for Pressure Testing Sewerage Pipes in accordance with the new European Standard EN1610.
- Pressure Plates are made of aluminium. Rubber Seals are commercial grade rubber mouldings. Thrustwashers are fitted as standard on all sizes.
- Pressure Gauge can be fitted as an option.
- Chemical resistant rubber seals can be supplied

# High Pressure Testing Plug – 2



- For Pressure Testing and Temporary Sealing of Water, Gas, Oil and Sewerage Pipes of any material.
- Pressure Plates are made of steel. The Plugs are fitted with a Ball Bearing Race for ease of tightening. Rubber Seals are commercial grade rubber mouldings.
- Pressure Gauge can be fitted as an option.
- Chemical resistant rubber seals can be supplied

**Warning -** Appropriate bracing or support must be provided before applying any back pressure in order to prevent the risk of accident.









# 'Drain Clear' Set

- > Drain Clearance Set in a handy carrying case.
- ldeal for use with short drain runs up to 30m.
- Available with either Universal or Lockfast Fittings. The advantage of Lockfast Fittings is that they cannot come undone down the drain.
- Ready packed in a strong polypropylene carrying case.
- > Set comprises of 30ft of rods, together with 100mm Plunger, Double Worm Screw and 100mm Drop Scraper.
- > Horobin quality guaranteed.
- Ideal for use with short drain runs up to 30m.
- > Available with either Universal or Lockfast Fittings. The advantage of Lockfast Fittings is that they cannot come undone down the drain.
- Compatible with most other makes of Polypropylene and Cane Rods.
- A wide range of Tools are available such as Rubber Plungers, Worm Screws, Drop Scrapers, Drain and Chimney Brushes.
- Rods available in 19mm, 21mm & 25mm diameter. Lengths are 3ft, 1.5m & 2m.
- Horobin quality guaranteed.

# Polypropylene Drain Rods & Tools



# Lockfast Steel Rods & Tools



- Ideal for use with long drain runs up to 1 km.
- Manufactured of high tensile steel, with a 2-way locking system which allows the Rods to be rotated both ways.
- Compatible with most other makes of Steel Rods.
- A wide range of Tools are available such as Rubber Plungers, Worm Screws, Drop Scrapers, Crown Root Cutters and Auger Root Cutters.
- > Rods are available in 8mm and 10mm diameter. Lengths are 1m, 1.5m and 2m.
- Horobin quality guaranteed.

# Plumbing & Heating Installation Tools

# **MONUMENT PIPE CUTTERS - COUPE**

**TUBES - ROHRABSCHNEIDER** 

# ADJUSTABLE SEMI-AUTOMATIC COPPER PIPE CUTTER

# COUPE-TUBE AUTOMATIQUE ROHRABSCHNEIDER AUTOMATIK

Order<br/>CodeDia. Pipes<br/>mmDisplay<br/>Pack300M8 - 22✓

#### **COPPER PIPE CUTTERS**

Order	Dia. Pipes	Dia. Pipes	Display
Code	mm	in OD	Pack
35TC	3 - 35	1/8 - 13/8	<b>V</b>

# Pipe diameters

Order Code	Size	min mm	max mm	min in	max in	Display Pack
264Y	0	4	22*	5/32	7/8	<b>\</b>
*264Y can	be used	for oc	casiona	l cuts o	n 28mn	n
265B	1	4	28	5/32	17/64	<b>V</b>
266E	2A	12	43	1/2	111/16	<b>V</b>
TC3	3	25	82	1	31/4	

# STAINLESS STEEL PIPE CUTTERS

# COUPE-TUBES ACIER INOXYDABLE ROHRABSCHNEIDER EDELSTAHL

Pipe diameters

Order Code	Size		max mm	min in	max in	Display Pack
271U	1	4	28	5/32	17/64	$\checkmark$
272X	2A	12	43	1/5	111/16	<b>\(</b>

# **PLASTIC PIPE CUTTERS**

# COUPES-TUBES PLASTIQUE ROHRABSCHNEIDER PLASTIK

Pipe diameters

Order Code	Size			min in		Display Pack
290B	2A	12	43	1/2	<b>1</b> 11/16	$\checkmark$
291E	3	25	81	1	3.2	



The use of pipe cutters rather than a hacksaw during installation of pipework avoids swarf entering systems which can cause problems on commissioning. High quality tools for use by professional and DIY plumbing installers, heating engineers and maintenance staff. Each tool assures a square, even cut.



Cuts automatically once it has been sized and after tightening no further adjustment or feeding of the wheel into the pipe is required.



A strongly made outer ABS plastic casing houses the inside mechanism made from steel which takes the load of the cut.

Made from zinc pressure diecast bodies. All parts liable to wear are heat treated. The fluted handles of sizes 1 and 2A are fitted with a spare wheel.





Fitted with wheels for cutting stainless steel plumbing and other light gauge stainless pipes. Both fitted with spare wheel.



Fitted with wheels for cutting thicker walled plastic pipes such as those used in central heating. No spare wheel fitted inside handle.







For work in confined spaces. Strongly made outer ABS plastic casing houses the inside mechanism

made from steel which takes the load of the cut. Cuts copper pipes once the gate of the tool is closed over the pipe. Tool can be rotated in either direction.



# **AUTOMATIC COPPER PIPE CUTTERS**

# COUPE-TUBE AUTOMATIQUE ROHRABSCHNEIDER AUTOMATIK

Order Code	Dia. Pipes mm	Nominal Size in.	Display Pack
15PC	15		<b>\(\sigma\)</b>
21PC	21	3/4	$\checkmark$
22PC	22		$\checkmark$
274PC	27.4		$\checkmark$
28PC	28		$\checkmark$

# **MONUMENT AUTOCUT®**

# COUPE-TUBE AUTOMATIQUE ROHRABSCHNEIDER AUTOMATIK

Order Code	Dia. Pipes mm	Nominal Size in.	Display Pack
1715C	15		<b>V</b>
1721V	21	3/4	<b>V</b>
1722Y	22		<b>V</b>
1727N	27.4		<b>V</b>
1728Q	28		<b>V</b>



RATCHET HANDLES (to fit Automatic Pipe Cutters and Monument Autocut®)

Order Code	Fits Pipe Cutter	Display Pack
15R	15PC, 1715C	$\checkmark$
22R	21PC, 22PC, 1721V, 1722Y	<b>V</b>



# **SPARE WHEELS FOR PIPE CUTTERS**

# **DISQUES**

# **SCHNEIDRADCHEN**

Order Code	Pack Qty	To fit	Display Pack		
To cut Copper	pipe				
W15PC	16	15PC, 21PC, 22PC, 274PC, 28PC	<b>\</b>		
301P	12	300M	<b>\</b>		
To cut Copper,	Brass, Alu	minium, Light Gauge Steel Pi	pes		
273A	12	264Y, 265B, 266E,TC3	<b>\</b>		
To cut Stainless	Steel Plun	nbing pipe, Golf Club Steel Sh	afts		
284I	12	264Y, 265B, 266E,TC3	<b>\</b>		
To cut Plastic p	ipe				
310R	10	264Y, 265B, 266E TC3	<b>\</b>		
To cut 15 & 22mm Copper pipe					
269N	16	1715C, 1721V, 1722Y, 1727N, 1728Q, 35TC, Pipeslice®	<b>\</b>		



# **PLASTIC PIPE CUTTERS**

Order Code	Max size mm		Display Pack
2640E	25		$\checkmark$
2645T	42	Ratchet	<b>V</b>
2647Z	60	Ratchet	<b>V</b>

# **DE-BURRING TOOLS**

# EBAVUREUR SCHNELLENTGRATER

Order Code Display
Pack
3020C ✓
Order Display

Code Pack
21170 ✓

2117Q ✓ De-burring tool
2118T ✓ (10) Spare blade- Steel & Aluminium
2119W ✓ (10) Spare Blade- Brass & Cast Iron

# **COPPER PIPE END CLEANER**

Order<br/>CodeSize<br/>mmDisplay<br/>Pack364C15✓

# **COPPER PIPE END CLEANER & DEBURRER**

Order Size Display
Code mm Pack

DBB1522 15 & 22 ✓

# INTERNAL & EXTERNAL COPPER PIPE END DEBURRER

Order Size Display
Code mm Pack

365F 42 ✓

# **WASTE PIPE DEBURRER**

Order	Size nominal	Displa
Code	in	Pack
3026U	11/4	<b>V</b>
3027X	11/2	<b>V</b>

# **BRUSHES FOR CLEANING FITTINGS**

# **BROSSES POUR TUBE**

# ANBRINGEN VON REINIGUNGSBÜRSTEN

 Order Code
 Size mm
 Display Pack
 Use

 3021F
 15
 ✓
 15mm fittings

 3022I
 22
 ✓
 22mm fittings

 3023L
 28
 ✓
 28mm fittings

# **COPPERKEY®**

Order<br/>CodeSize<br/>mmDisplay<br/>PackUse2915Q<br/>2922M15✓15mm pipe & fittings22✓22mm pipe & fittings



Disposable type. Ideal for de-burring inside copper pipe. Swivelling blade rotates freely to enable all sorts of de-burring operations to be carried out inside pipes, on sheet materials, inside holes etc. Works on steel, copper, brass, plastics, wood and castings. Plastic body.

Replaceable Blade type. Similar specification to above but button release for renewable and changeable blades. Metal body.

Disposable. Cleans the outside of copper pipe with a few turns prior to soldering.





Cleans and de-burrs 15 and 22mm copper pipe. One size at each end of the tool.

De-burrs internally and externally up to 36mm copper pipe





For cleaning the inside of copper fittings and socket formed joints on copper pipe prior to soldering. Stiff steel bristles.



Made in

The very best and safest way to prepare copper pipe and copper fittings. Long lasting double stemmed brushes clean quickly. Quick thorough tubing prep with patented tungsten carbide abrasive technology. Works 3 times

faster and lasts 4 times

longer than conventional tools.

Patented ratchet handle makes jobs possible in all tight spaces.
Eliminates the risk of scrapes or flux burns.



Pack of 3 brushes with loop handle and nylon bristle heads

180 grit silicone carbide strips of abrasive waterproof open mesh material for tough cleaning jobs. For roughing up plastic pipe, cleaning inside fittings (can be cut into small strips), deburring metal and

wood surfaces.

Medium grade 50 mm x 250 mm pads for cleaning, polishing, rust removal, scrubbing and blending.

Washable, will not rust and does not break up during use.

Designed to remove an olive from copper pipe without damage to the pipe and without producing swarf.

Carbo nitrided carbon steel cutting blades. Specifically designed to remove copper and brass olives. Do not attempt to remove stainless steel olives with this tool.

Patented tool for removing 15mm, 22mm and 3/4" olives. Engages with 14tpi thread of the compression fitting.

For joining two pieces of copper pipe of equal diameter together without using fittings. The resulting capillary joint can be soft or hard soldered. The loose socket former allows easier withdrawal of tool after use.



#### **FLUE BRUSHES**

Order	Length	Size	Display
Code	mm	mm	Pack
3014J	405	Ø16, Ø50, 50x16 rectangular	<b>~</b>

# **ABRASIVE CLEAN-UP STRIPS**

#### **CLEANING AND POLISHING PADS**

Order	Display
Code	Pack
3025R	<b>√</b> (5)

#### **OLIVE REMOVING TOOLS**

#### **OLIVE CUTTERS**

Order	Copper pip	e dia.
Code	mm	in
2034N	8	
2033K	10	
2030B	15	1/2"
2031E	22	

2031E will not fit 3/4" Imperial olives

# **OLIVE PULLER**

**2036T** 15, 22 <sup>3</sup>/<sub>4</sub>" ✓

# **COPPER PIPE JOINTERS / SOCKET FORMERS**

# OUTILS A FORMER LES EMBOITEMENTS MUFFENFORMER

Order Code	OD mm	VVall mm	Display Pack
131W	15	0.7	$\checkmark$
133C	22	0.9	<b>\</b>
134F	28	0.9	
<b>220S</b>	15	1.0	$\checkmark$
222Y	22	1.2	<b>\(\right\)</b>

#### 15 & 22mm COMBINATION SOCKET FORMER

Order	OD	Wall	Display
Code	mm	mm	Pack
138R	15, 22	0.7, 0.9	$\checkmark$

# **FLUX BRUSHES**

Order	Length	Size	Display
Code	mm	mm	Pack
3015M	195	10	<b>V</b>

# **COPPER PIPE JOINTING SET**

# OUTILS A FORMER LES EMBOITEMENTS MUFFENFORMER

Order OD mm

139U 15, 22, 28



# **INTERNAL BENDING SPRINGS**

# **RESSORTS A CINTRER LES TUBES KUPFERROHR-BIEGEFEDER**

KOI I LIKIK	JI IIX-DIL	OLI LDLIN	
Order	OD	Wall	Colour
Code	mm	mm	Code
828O	8	0.6	Gold
827L	10	0.6	Gold
829R	12	0.6	Gold
830 <b>V</b>	15	0.7	Gold
832B	22	0.9	Gold
833E	28	0.9	Gold
834H	35	1.2	Gold
Order	OD	Wall	Colour
Code	mm	mm	Code
840A	15	1.0	White
841D	22	1.2	White
877K	28	1.2	White
878N	35	1.5	White
843]	20	Conduit Spring	

# **EXTERNAL BENDING SPRINGS**

Order Pipe dia. mm OD. Code 8 10

Round section wire.

# **MONUMENT COPPER PIPE BENDER**

# **CINTREUSE POUR TUBES ROHRBIEGEMASCHINE**

Order Copper Pipe Stainless steel Code Size mm Size mm 2600K 15 & 22 15

# **PIPE BENDER SPARES**

Display Order Code Pack **2601N** 15mm guide **2603T** 22mm guide

**2605Z** Hook Stop 2609L 15mm Former 2610P 22mm Former

Guides will fit some alternative manufacturers pipe benders.

# **MINI PIPE BENDER**

Order Copper Pipe Size OD Code 6mm, 8mm, 10mm

1/4", 5/16", 3/8"



Made for igniting LPGas and welding torches. Cup shaped shield traps the gas and assures ignition.





# **FLINT SPARK LIGHTERS OR STRIKERS**

# **ALLUMEUR A PIERRE A FEU FEUERSTEINANZUNDER**

Order Display Code Pack 3418L Spare Flints

3421**V √**(5)

#### TRIGGER TORCH

Order Code		Display Pack
3440C	Trigger torch	<b>V</b>
3445R	Adaptor fits Primus® 2000 & Calor® 340	<b>\( \)</b>
3441F	Gas torch-sealing washer	$\checkmark$
3446U	Tip end for 3440C	<b>V</b>

The H2&O Wet & Dry Test Kit has been designed to offer the professional plumber & installer the equipment to pressure test most common applications with its selection of connectors and gauges

Pressures of up to 25 bar can be read from the Gauges with an accuracy of +/- 2.5%. Each gauge is protected with a high shock absorbing rubber boot cover.

Additionally a peak reading needle allows for readings to be taken when the gauge is left unattended



#### WET AND DRY TEST KIT

Order Code

1514R Kit Contains:

1 x Plastic Carry Case

1 x Dry Test Gauge 63mm diameter

(0-4bar) x 15mm IG Speedfit™

c/w Schrader Valve test point fitted with Peak Reading Needle

1 x 63mm diameter Pressure Gauge (0-11 bar) fitted with Peak Reading Needle

1 x 63mm diameter Pressure Gauge (0-25 bar) fitted with Peak Reading Needle

3 x Rubber Gauge Boots fitted to above

1 x Rubber Tap Connector

1 x 10 bar Flexible Hose

1 x Gauge Adaptor

1 x PVC covered chain c/w 2 screws & washers

1 x CP Reducing Bush 3/4" x 1/2"

1 x |G Speedfit™ 15mm x ½" stud

1 x |G Speedfit™ 15mm x ½" stem

1 x JG Speedfit™ 22mm x ¾" stud

1 x JG Speedfit™ 22mm x ¾" stem

6 x O rings

1 x Filling Tee Adaptor 1/4"



#### **MOPITUP®**

Order Code

2951Y

Pack of 3 sheets

The versatile super absorbent sheet. The quick, easy and effective way to clean up all water based spillages in the home or workplace. Each 370mm  $\times$  370mm sheet absorbs up to 2 litres of water

Mopitup® will ONLY absorb water based fluids. Can be placed ONTO spilt water by turning it so the plastic side is upper most and the net is towards the water spill. Can be placed INTO water containers and will "suck" out the water i.e. draining cisterns, drains, holes. The 'gel' formed is non toxic and safe (but note that the contents are only safe NOT the additive contaminant).

# monument

#### Ideal for:

- plumbing emergencies and repairs
- dripping radiators
- radiator and pump removals
- leaking pipes, toilets and basins
- · overflow leaks in roof tanks
- · leaking hot water tanks
- · fridge and freezer defrosting
- · large floor spillage
- protection for carpets and floors
- · draining header tanks
- no drips, no mess, no stains
- water is 'locked' in and cannot be squeezed out, unlike a sponge

# **FLAMEBARRIER PAD**

 Order
 Size
 Display

 Code
 in
 cm
 Pack

 2353G
 11 x 8
 28 x 20
 ✓

# **SOLDERING AND BRAZING PADS**

# **PARE FLAME**

# LOT UND HARTLOTKISSEN

Order<br/>CodeSquare<br/>inDisplay<br/>cmWoven glass fabric. Professional quality2350X12 x 1230 x 30

Order	Squ	ıare	Display
Code	in	cm	Pack
HDW graph	ite, woven gla	assfibre	

 $25 \times 25$ 

OrderSizeDisplayCodeincmPack

Asbestos free (heavy duty) mat

 $10 \times 10$ 

Professional quality soldering & brazing mat

2348Q 12 x 10 30 x 25



Order Code	Pipe Size mm	Display Pack
2355M	15 to 22	<b>~</b>
2356P	28 to 50	$\checkmark$
2358V	50 to 100	<b>V</b>






Designed to protect surfaces from deflected heat surrounding a soldering operation. Even after outer fabric breakdown occurs the infill will prevent any thermal transfer withstanding temperatures up to 1260°C

For protection of surrounding areas when soldering etc. both these pads resist temperatures up to 600 deg.C and do not present any of the hazards associated with asbestos materials.



Heat should not be concentrated for long periods on the same area of the pad.





Patented variable cut out mats for soldering pipes.
Reduces the risk of fire. Protects walls, cables, carpets and other flammable materials. The unique shape with overlap gives a tight and secure fit.



# **Exporting Company Ltd**



# **SCREWDRIVERS**

Order Code

Size

1517A

300mm blade length 450mm blade length

# **TURNPINS**

#### **TOUPIES**

# **ROHRAUFWEITER**

Order	Base Dia		Display
Code	in	mm	Pack
602E	11/2	38	$\checkmark$
604K	2	50	$\checkmark$



Best quality white moleskin cloth, closely

woven. Approx 36in. 91cm wide

Used for wiping lead joints during soldering. Made from best quality moleskin cloth, 6 ply thick. Properly folded with oilboard layer and securely sewn.

# **WIPING CLOTHS**

Order	Size		Display
Code	in	mm	Pack
551W	2½ x 1½	$63 \times 38$	<b>\(\sigma\)</b>
552 <b>Z</b>	$3 \times 2$	$75 \times 50$	$\checkmark$
556L	3½ x 2½	$88 \times 63$	$\checkmark$
558R	4 x 3	$100 \times 75$	$\checkmark$
560Y	$4\frac{1}{2} \times 3\frac{1}{2}$	114 x 88	<b>\(\sigma\)</b>
563H	5 x 4	$125 \times 100$	$\checkmark$



# **MOLESKIN**

# **MOLESKINE**

# **MOLESKIN TUCH**

Order	Size	
Code	in	cm
570D	$39 \times 36$	100 x 91
572J	36 x 10	91 x 25



pulling electric cables through conduit etc. Best quality hard white tallow.

# **TALLOW**

**SUIF** 

TALG

ALG	
Order Code	
261P	l pla

Code		Approx kg	5
261P	Plastic tub/outer	0.25	Small
<b>262S</b>	Plastic tub/outer	0.50	Medium
263V	Plastic bucket	4	Large
260M	Box/polythene liner	12.5	XL

Used for packing and insulation. Asbestos free. For

operational temperatures up to 600 deg C. Resistant to oils, most chemicals and solvents and is unaffected by bacterial growth. Constructed from a thick glass yarn wall coupled with a stranded centre glass yarn core. Ideal for use in dry, static sealing applications involving hot air and combustion gases. Supplied on reels.

# **GLASSFIBRE YARN**

Order	Diameter		Approx length per reel		
Code	in	mm	metres		
2330N	1/4	6	25		
2331Q	<sup>5</sup> /16	8	25		
2332T	3/8	10	25		
2333W	1/2	12	25		
2334Z	3/4	19	25		

#### **WATER FLOW GAUGE**

Order	Scale		Display	
Code	Litres	Gallons	Pack	
1515U	2-25	1–5	<b>V</b>	

# **DIGITAL THERMOMETER**

Order	Display
Code	Pack
1520K	$\checkmark$

# **MAINS WATER PRESSURE TEST GAUGE**


Order		Display
Code	Scale	Pack
1510F	kPa, psi, bar	<b>V</b>


# **DRY TEST GAUGE**

Order	Display
Code	Pack
1512L	<b>✓</b>

wound around male threads. Suitable for steam, water, gases and liquids. Low coefficient of friction.

For dry testing of pressure systems prior to commissioning. Complete with Schrader valve and 15mm Pushfit® fitting. Maximum 4





# **PTFE TAPE**

Order	L	W	Thick.	L	W	Thick.	Display
Code	ft	in	in	m	mm	mm	Pack
541R	40	1/2	0.003	12	12.7	0.076	$\checkmark$
540O	40	1/2	0.003	12	12.7	0.076	_

#### **MIRROR**


**MIROIR SPIEGEL** 

> Order Size Code mm 798T 4 x 4 100 x 100

200mm (8") folded, extends to 330mm (13")

Magnetic, 180mm (7") folded, extends to 610mm (24")





For easy and quick setting of operating flow

installation of washing m/cs, boilers, showers etc; for checking if combi boiler or water

Dual scale 2 to 25 litres, 1 to 5 gallons. Sturdy durable plastic design. Long life stainless steel

heater needs de-scaling.

1515U

11 bar maximum. 3/4" BSP thread for fitting to taps.

1520K

bar.

mesh strainer avoids turbulence.

rates to manufacturers specification prior to

1512L











Die-cast aluminium handle and square section tubular steel frame combine to give a lightweight tool with great tensile strength. Adjusts to give 45° angle for flush cutting. Supplied with 24tpi 12" 300mm blade.



For use on stainless steel, cast iron, mild and galvanised steel, aluminium, copper, brass, plastics and wood. High quality tools with M42 Cobalt High Speed Steel

Cutting blades with variable pitch teeth.

Holesaws with integral shank and pilot drill supplied with a split point HSS pilot drill which reduces skidding on convex surfaces, eliminating the need for pre-punch.

Depth of cut 32 mm (double depth if the work is reversed). Do not exceed recommended working speeds, as shown in table opposite.

#### **ESSENTIAL LUBRICANTS:**

When cutting mild steel (incl. aluminium, copper, brass, zinc, plastics, wood) no lubricant is necessary.

When cutting cast iron use paraffin. When cutting stainless steel use Cutting Compound.



#### **HACKSAW**

# SCIE A METAUX KLEINSAGE

Code Code	in	mm	Display Pack
1921D	12	300	<b>V</b>
HSS Blades	24 tpi		
1922G	12 x ½	$\times$ 0.025in	
	300 x	13 x 0.65mm	<b>√</b> (10)

# **JUNIOR HACKSAW**

Order Code	S	ize	Display Pack
2000M	6in	150mm	<b>V</b>
Blades 32 t	pi		
1120U	x 1/4 x	0.015in	<b>√</b> (10)
	150 x	6 x 0.38mm	

## **SPADE BIT SET**

Order		Display
Code	Sizes	Pack
1950P	10mm, 12mm, 16mm,	$\checkmark$
	18mm, 20mm, 25mm	

#### **RAZOR SAW**

Order		Display	
Code	Size	Pack	
1952V	165mm	$\checkmark$	

# **MONUMENT HOLE SAWS**

# **SCIES-CLOCHES - LOCHSAGEN**

Order Code	Dia. mm	Use	†Mild steel	Cast iron	Stainless steel	Display Pack
10mm shar	nk. Or	ne piece holesaw	rpm	rpm	rpm	
1848E	22	½in BSP	390	260	195	$\checkmark$
11.5mm sh	ank. C	One piece holesaws				
1849H	28	3/4in BSP	300	200	150	$\checkmark$
1850L	35	1in BSP	245	165	125	<b>\</b>
18510	45	11/4in.BSP	190	130	95	<b>V</b>
1852R	50	1½in.BSP	160	105	90	<b>\</b>
1853U	64	2in BSP	130	85	65	<b>V</b>
1857 <b>G</b>	70	23/4in Soffit Board Ventilator	115	75	55	<b>V</b>

1899**G** 

Plumbers Holesaw Kit with 22mm 28mm 35mm 45mm 50mm 64mm holesaws with integral shanks. Includes 2 drills and screwdriver and display box.



#### **RAPID-DOSE®**

Order Code

611G Filling loop tool621L Universal dosing kit612J Radiator dosing point

Radiator vent pin adaptors

M6 for Barlo® radiators
M5 for Stelrad® radiators
M4 for Myson® radiators

626A Grundfoss® circulating pump dosing adaptor
628G Wilo® Terrier® Dab® Circulating pump
dosing adaptor

613M RAPID DOSE Tool kit

630N Central heating protector. Protects against scale, corrosion & bacterial growth. 200ml can treats 5 radiators.

Pre-commissioning cleaner. Removes flux residues, greases, oily contaminants, sludge and debris 400ml can treats 10 radiators.

Non Acid Sludge Dissolver. Dissolves sludge and restores heat and flow. 400ml can treats 10 radiators...

400ml Central Heating Protector
Inhibitor Test Kit. Tests the concentration
level of inhibitor. 40 tests per kit.

# Dose a sealed system within a matter of minutes with RAPID-DOSE

- No need to draw off water, release system pressure or wait for system to cool
- Specifically designed to meet the requirements of modern condensing boilers
- Discharges in under a minute
- Suitable for all metals including aluminium
- No mess.

# How does RAPID-DOSE work?

RAPID-DOSE works by holding the product (inhibitor or cleaner) in a bag inside the canister. This separates the product from the propellant and means that although the product is squeezed out of the bag by the pressure, the propellant never leaves the canister. As the pressure in the canister is greater than system pressure, the canister rapidly discharges into the heating system.


#### **FLITZ METAL POLISH**

Order Code	Size	Pack Type	Display Pack
FLITZ TS010	2g	Trial Size	
FLITZ BP03509	10g	Blister Tube	$\checkmark$
FLITZ BP03511	50g	Blister Tube	$\checkmark$
FLITZ BU03515-F	150g	<b>Boxed Tube</b>	$\checkmark$
<b>FLITZ CA03518-6</b>	906g	Tin	

# RAPID-DOSE

# THE EASY WAY TO DOSE SEALED HEATING SYSTEMS

Aqueous Logic is revolutionising water treatment with a new dosing system designed to make water treatment easier and less expensive. RAPID-DOSE is a disposable pressurised canister, pre-filled with inhibitor (or cleaner), that can be used to dose a sealed system within a matter of minutes. There's no need to release system pressure or draw off water. Simply connect the canister to the filling loop isolation valve, radiator dosing point or circulating pump dosing point using the purpose designed RAPID-DOSE connector, and the canister will discharge itself.

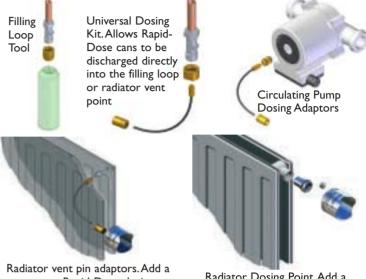

Radiator vent pin adaptors. Add a permanent Rapid-Dose dosing point by adapting a standard radiator vent point

Radiator Dosing Point. Add a permanent Rapid dose dosing point by replacing a blank in a four connector radiator

621L



Flitz Paste Metal Polish is a concentrated cream which cleans, polishes, de-oxidises and protects brass, copper, silver plate, chrome, stainless, nickel, bronze, gold, aluminium, painted surfaces, glass.

Removes tarnish, water stains, chalking,

lime deposits, heat discolouration, oxidation, tar, oil, tree sap. Non-abrasive, non-toxic, non flammable.



# **Drain Cleaning Equipment**

# **DUAL ACTION FORCE PUMP**

Order Code Disp

Display Pack

# **FORCE CUPS**

Order		Diameter			Display	
Code	Size	in	mm	mm	Pack	
1456N	Small	3	75	115	<b>V</b>	
1457Q	Medium	4	100	255	<b>V</b>	
1458T	Large	43/4	120	405	<b>V</b>	

#### **PLUNGER**

Order Display Pack

459W

Display

Pack

✓

#### MINI PLUNGER

Order	Display
Code	Pack
M-M3	<b>\</b>

# **TOILET PLUNGER**

Order	Display
Code	Pack
MP1600	<b>\(\sigma\)</b>

# **HANDY PLUNGER**

Order	Display
Code	Pack
1460Y	$\checkmark$

# **SUCTION OR COOPERS PLUNGER**

Order	Rubbe	r Dia
Code	in	mm
1453E	51/2	140

#### **RUBBER PLUNGERS**

Order		ınger meter	Handle	length
Code	in	mm	in	cm
184E	4	100	30	76
185H	6	150	30	76

# **SINK WASTE CLEANER**

Order	Le	ngth	D	ia	Display
Code	ft	m	in	mm	Pack
909L	6	1.8	1/4	6	<b>\(\sigma\)</b>
910P	12	3.6	1/4	6	$\checkmark$



Hollow spring wire cable with bulbous head for unblocking sinks, urinals, bath wastes, showers, small drains, etc. Rotating crank handle with thumbscrew fits over and locks cable. 1/4in 6mm size suitable for entry through strainers. DFI H-O A cleaner way to unblock drains. The 1/4in 6mm spring is fed out of the container into the drain, keeping it away from clean kitchen and 3315Y bathroom surfaces. Complete instructions on attractive display pack 33138 C-25PL Snake attaches to electric drill. The snake is encased in a plastic tube that remains stationary as the snake is rotated by an electric drill. Equipped with an automatic clutch that slips if the boring head gets **Plastic** caught in the line bowl guard. 3354P 3349Z Cleans WC pans and gullies. Barrel type head on end of 3/8in 10mm spring with ring for attachment when not in use. LINK Rods made from black japanned steel spring wire. Rods can be joined together using a key. Flexible enough to negotiate acute bends.

Sets are supplied with rods and fittings as indicated, each set with straps.

# **DRAIN CLEARING SPRINGS**

Order

Order

Code

Code	Ref	ft x in.	m x mm	Pack
For sinks, bat	ths, showers	small pipe	s	
3343H	15PQH	15 x ½	$4.5 \times 6$	$\checkmark$
3344K	25PQH	25 x ½	$7.5 \times 6$	<b>V</b>
For larger pi	pes 2-3in 50	-75mm		
3347T	50PMH	50 x 3/8	15 x 10	<b>V</b>

Length

Dia.

Diameter Display

m x mm Pack

Display

#### **DRAIN UNBLOCKERS**

Sinks, baths, showers, small pipes

Ref

Steel containe	er					
3313S	25SM	25 x ½	7.5 x 6	<b>V</b>		
Plastic contain	ner					
3315Y	20PL	20 x ½	6 x 6	$\checkmark$		
C-25PL	C-25PL	$25 \times \frac{1}{4}$	7.5 x 6	<b>V</b>		
3316B Spare Locking Screw Assembly						

Length

ft x in

# **DRILL SNAKE**

**Order Code** 

3351G 15' 4.5m Effective length
3351G-CLUTCH Spare Clutch for 3351G

# **TOILET PAN UNBLOCKERS**

Order			ngth		)ia	Display
Code	Ref	ft	m	in	mm	Pack
3349Z	3NKH	3	0.9	3/8	10	<b>V</b>
3350D	6NKH	6	1.8	3/8	10	<b>V</b>
3354P	3FL	3	0.9	1/2	12	$\checkmark$

Also see page 38

# **STEEL DRAIN RODS**

Order	Length		Roc	Rod Dia	
Code	ft	m	in	mm	in set

Ths set includes Starter; Backlength; Adaptor to universal joint; Key; Handle. No other fittings available.

**9081** 6 1.8 ½ 12 2

Spares for ½in 12mm sets

Order Code

903T	Spare 3ft 0.9m Backlength
904W	Ferret Starter 3' x 1/2"
905Z	Ferret Handle 1/2"
906C	Ferret Key 1/2"
907F	Ferret Adaptor 1/2" to Universal Joint Cane


The following sets include Handle; Key; Double worm screw; 4in 100mm Plunger & Drop scraper

	80.		P 00. apo.		
893I	30	9	3/4	19	10
202E	40	10	3/4	10	20

Spares for 3/4in 19mm sets

spai es ioi	74111 1 7111111 3003
895O	Spare 3ft 0.9m rod
896R	4" 100mm Drop Scraper
897U	Clearing Wheel
898X	Double Worm Screw
899A	4" 100mm Plunger
900K	Key
901N	Handle
902Q	Adaptor 3/4" to Universal Joint



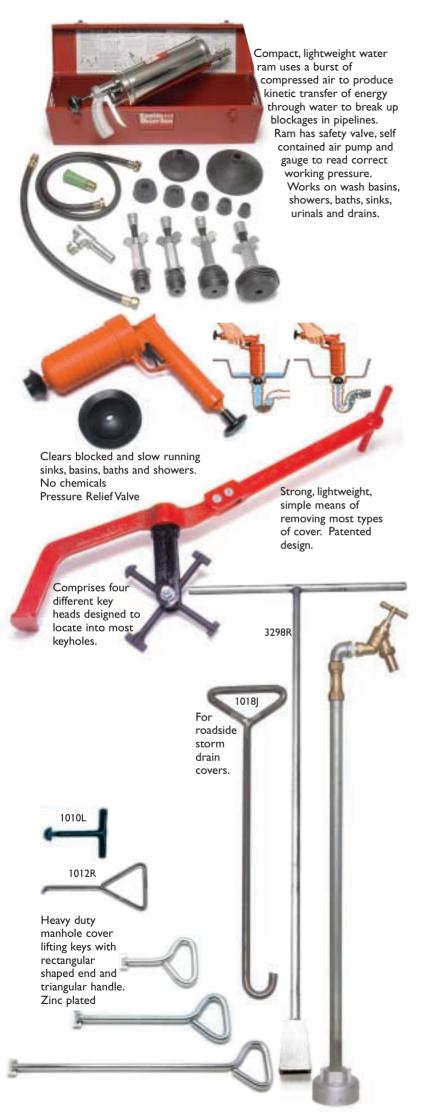

# KINETIC WATER RAM

Order Code

**3336L** Complete with 1½", 2", 3", 4" (38, 50, 75,

100mm) plugs; 5 bungs ½" to 3".; 7" 175mm WC cleaning disc; water filling and caulking hoses; tap connector; carrying case; instructions; couplings & connectors.

3337P Set of 5 bungs

# **PANGO® PROFESSIONAL POWER PLUNGER**

1621R Complete with adaptors to fit most sinks, basins, bidets, baths & showers. Plastic construction. 15 pumps gives approx 3bar of pressure.

#### **MANHOLE LIFTERS**

Order Length Code

Manufactured from ductile iron

1013U 910

1017**G** Spare head for 1013U

# **STANDPIPE KEY**

Order L Code in m

3298R 36 1 For opening & closing fire

hydrant valves. 2" tapered

opening.

# **STANDPIPE**

Order Code

3/4" Contractors Standpipe. Complete with hydrant base, double check valve and single 3/4" tap outlet

#### **GULLEY KEY**

Order Code 1018J

# **MONUMENT TOOLS**

# **MANHOLE COVER LIFTING KEYS**

Order	Lei	ngth	Hand	le width		End
Code	in	mm	in	mm		shape
Malleable in	on.Tee	handle	9			
1010L	5	125	4	100		D
For light du	ity mar	nhole c	overs			
1012R	8	200	4	100		
Closed han	dle				Size mm	
MLK06	5	150	4	100	35x15x4	
MLK12	12	300	4	100	35x15x4	
MLK20	20	500	4	100	35x15x4	
MI K24	24	600	4	100	35×15×4	

All manhole cover lifting keys are sold in pairs



# SAFE LIFT MANHOLE COVER LIFTING SET

Order Code

Ref

1030**V** 

**DDK1MON** Safe Lift Kit

The 'Safe Lift' kit includes:

Pairs of: Heavy duty quick release lifting handles, 23mm & 35mm wide drain keys, 7mm rounded hooks, 8mm & 10mm & 12mm diameter threaded screw-in tips.

Carry case.

Spares for 'Safe Lift' kit.

Order

Code Ref Size Use 1031Y DDK1 Heavy dutyquick release lifting

handles

T1004 1032B

Slotted light 23<sub>mm</sub> wide drain key

T1001 35mm duty covers

Slotted heavy wide drain key duty covers

T1006 7<sub>mm</sub> rounded hook Light duty covers with key holes

1035K

T1007 8mm diameter

covers with

threaded screw-in tip

threaded lifting points

T1008 10mm diameter threaded

covers with threaded

T1009 12mm diameter

lifting points screw-in tip

threaded screw-in tip

covers with threaded lifting points

Accessories

E1001 Extension handle

B1001 Bottle jack



The optional extension handle incorporates a crow bar style tip to facilitate lifting of covers, can be used to extend the standard heavy duty quick release handle and also, when used in conjunction with a bottle jack, to 'pop' stubborn covers.



# **HYDRAULIC MANHOLE COVER LIFTER**

Order Code

1043J 1044M Hydraulic manhole cover lifter

Spreader Bars



Hydraulic manhole cover lifter is quick to assemble and simple to use. The lifter can give up to 1.5 tons of lift, making easy work of the heaviest manhole cover. The lifter is supplied with 4 sets of keys which will enable most types of cover to be lifted. Weight 25kg.


Also available are spreader bars which enable 4 keyhole covers to be lifted. These bars also have a seal breaker which help ease covers which have not been lifted in a long time.



Handy Snakentainer helps
eliminate messy floors when
cleaning out blocked small
pipes. Collet chuck tightens
firmly on cable with a quarter turn.
Rotation by electric drill or crank handle
whilst holding rotating hand grip.
Durable steel container can hold up to 25' x 3/8"
or 50' x 1/4" cable.

Rotary Handle - Instead of using the Snaketainer above, the handle with two smoothly operating hand grips will fit all the cables shown on the left. The locking screw of the handle fixes the cable in position whilst rotating. All GENERAL professional quality hand tool cables have a 42 strand wire rope centre. Coiled right handed to make manual A large crank handle at operation easier the back of the drum through greater gives powerful leverage. flexibility. After a few turns the speed and momentum breaks through the most obstinate blockages. Rust resistant treated steel drum with carrying handle fitted.

Made specifically for the difficult job of removing solid objects from blocked WC pans. After working the first 3' 0.9m into a WC pan or gully there is a further equal length of cable telescoped inside the guide tube operated by pressing a button and pulling back the crank handle. Double spring Flexicore cable with vinyl guard to avoid scratching WC pans.



Compact, lightweight water ram uses a burst of compressed air from a carbon dioxide bulb to produce kinetic transfer of energy through water to remove blockages in pipelines. Ideal for "soft" blockages such as those normally encountered domestically caused by organic matter e.g. paper, hair, fat, grease, general kitchen waste, plastic cups, towels, uric acid and soft lime scale etc.

#### PROFESSIONAL DRAIN UNBLOCKERS

3311M D-25-0 Empty Container with Electric Drill attachment.

Fits cable 3318H, 3319K, 3320O, 3322U.

**DELH-O** Rotary Handle

Fits all the cables shown below

Order Code	Length ft in	x Dia m mm	Ref
Sink traps; s	howers; basins		
3318H	$25 \times \frac{1}{4}$	$7.5 \times 6$	L-25FL1
11/4in 35mm	wastes		
3319K	$50 \times \frac{1}{4}$	$15 \times 6$	L-50FL1
Heavier duty	/- small pipes		
<b>3320O</b>	25 x <sup>5</sup> /16	$7.5 \times 8$	L-25FL1-A
11/4 - 3in 35	- 75mm pipes		
3322U	$25 \times \frac{3}{8}$	$7.5 \times 10$	L-25FL2

Order Code Ref

3334F 400 Empty Spin-Drive Snakentainer

Cables for use with Rotary Handle or Spin-drive Snakentainer  $1\frac{1}{4}$  - 3in 35 - 75mm pipes

3323X	$50 \times \frac{3}{8}$	$15 \times 10$	50FL2
3 & 4in 75 8	& 100mm pipes		
3324A	25 x ½	$7.5 \times 12$	25FL3
3325D	$50 \times \frac{1}{2}$	15 x 12	50FL3

# **TELESCOPING TOILET PAN UNBLOCKER**

Order Code

**T6FL-DH** 6' 1.8m Effective length

# **MONUMENT TOOLS**

## **KYNA-COLT KINETIC RAM**

Order Code

33370 Kyna-colt in toolbox with 2 toilet discs, 3 expanding plugs and tap connector. No bulbs

supplied

3338R Spare Carbon Dioxide bulbs. Approx. 45 psi





# **POWER DRAIN CLEANER COMPARISON CHART**

•	SUPER-VEE POWER-VEE HANDYLECTRI PH DRAIN ROOTER	Typical Applications Sinks Bath Wastes C Roof Stacks	For use in following Pipe Sizes 1½" - 3" (35 - 75mm)	Maximum Capacity 35' x 3/8" or 50' x 5/16" (10.5m x 10mm or 15m x 8mm)	Operating Re Weight 7kg with 25' x 3/8" (7.5m x 10mm)	Distance 50' (15m)	d Motor Horsepower 2.7 A
•	MINI-ROOTER MINI-ROOTER XP	Small drains, Inside work, On roofs (Not for roots)	1½" - 3" and most 4" (35 - 75mm and most 100mm)	75' x ½" (23m x 12mm)	23kg with 75' x <sup>3</sup> /8" (23m x 10mm)	75' (23m)	¹∕3HP
•	SEWEROOTER T-3	Small drains, Inside work, On roofs (Not for roots)	1½" - 3" and most 4" (35 - 75mm and most 100mm)	100' x ½" (30m x 12mm)	52kg	100' (30m)	1∕3H <b>P</b>
•	METROROOTE	R Roots and scale	3"-6"	75' x 5/8" (23m x 16mm)	76kg	75' (23m)	1/3HP
•	SPEEDROOTER 91	Combination Sewerooter T-3 and Maxi-Rooter	2" - 10" (50 - 250mm)	100' x <sup>3</sup> / <sub>4</sub> " or 100' x <sup>1</sup> / <sub>2</sub> " (30m x 19mm or 30m x 12mm)	108kg	200' (60m)	1/2HP (Optional 3/4HP)
	MAXI-ROOTER	Heavy Duty Roots, Sand, Rags Grease, Lime Deposits, Industrial Plants	3" - 10" (75 - 250mm)	125' x <sup>3</sup> / <sub>4</sub> "or 150' x 5/8" (38m x 19mm or 45m x 16mm)	114kg	200' (60m)	<sup>3</sup> / <sub>4</sub> HP

# GENERAL ELECTROMECHANICAL DRAIN CLEANERS

All the GENERAL Electromechanical Drain Cleaners use FLEXICORE WIRE ROPE CENTRE CABLES. Heavy gauge wire is coiled around 42-strand wire rope and heat treated. Cables are of high strength and correct flexibility. Electric machine cables are wound left hand.


# **FLEXICORE CABLE**

Replacement Cables / Cables for Super-Vee, Power-Vee, Collet Chuck Handylectric and PH Drain Rooter:

uck mandylectric	c and PH Dra	am Kooter:			
	Dia. & Length				
Cable No	m x mm	$ft \times in$	kg		
sin Plug Head					
25HE1	7.5 x 6	$25 \times \frac{1}{4}$	1.8		
50HE1	$15 \times 6$	$50 \times \frac{1}{4}$	4.1		
25HE1-A	$7.5 \times 8$	$25 \times \frac{5}{16}$	2.7		
50HE1-A	$15 \times 8$	$50 \times \frac{5}{16}$	5.5		
e Connector					
25HE2	$7.5 \times 10$	$25 \times \frac{3}{8}$	3.2		
35HE2	$10.5 \times 10$	$35 \times \frac{3}{8}$	4.5		
	Cable No sin Plug Head 25HE1 50HE1 25HE1-A 50HE1-A	Dia. & I  Cable No m x mm  sin Plug Head  25HE1 7.5 x 6  50HE1 15 x 6  25HE1-A 7.5 x 8  50HE1-A 15 x 8  e Connector  25HE2 7.5 x 10	Cable No m x mm ft x in  sin Plug Head  25HE1 7.5 x 6 25 x ½  50HE1 15 x 6 50 x ½  25HE1-A 7.5 x 8 25 x 5½  50HE1-A 15 x 8 50 x 5½  e Connector  25HE2 7.5 x 10 25 x ¾		



Heavy gauge wire coiled tightly around a 42 strand aircraft type wire rope and heat treated. Has the correct strength and flexibility. 1/4" and 5/16" cables have basin plug ends and cables of 3/8" 10mm and larger can be fitted with cutters to their female connectors.

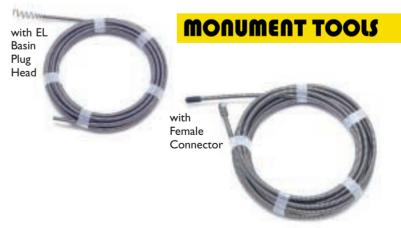

MANUFACTURER'S FLEXICORE CABLE F	RECOMMENDATIONS
FLEXICORE CABLE SIZE	FOR USE IN FOLLOWING PIPE SIZES
<sup>1</sup> / <sub>4</sub> " Cable	1½" – 2" pipes
5/16"Cable	1½" – 2" pipes
3/8" Cable	2" – 3" pipes
½" Cable	3" – 4" pipes (not roots)
5/8" Cable	3" – 6" pipes
<sup>3</sup> / <sub>4</sub> " Cable	4" – 10" pipes





#### The Small Drain Specialist.



#### **SUPER-VEE**

Order

Order

Order Code	Cables i		Cable	BoxedWt
(Unit No/Volt. 50Hz)	m mm	ft in	Ref	kg
The following ur	nits include 2	2 cables ar	nd the HECS	cutter set
3009T	$7.5 \times 6$	25 x ½	25HE1	9
SV-A/240	$7.5 \times 10$	$25 \times \frac{3}{8}$	25HE2	
3011A	$7.5 \times 6$	25 x ½	25HE1	9
SV-A/110	$7.5 \times 10$	$25 \times \frac{3}{8}$	25HE2	
The following ur	nits do not i	nclude the	HECS cutte	r set
SV-F-240V	$7.5 \times 6$	$25 \times \frac{1}{4}$	25HE1	6
SV-F-110V	$7.5 \times 6$	25 x ½	25HE1	6

HECS Handylectric Cutter Set includes:

Part

Code	No.	
3153E	AH	Arrow Head
3154H	FAH	Flexible Arrow Head
3159W	11/4SCB	11/4" 32mm Side Cutter Blade
3155K	BG	Boring Gimlet
3156N	DHBG	Down Head Boring Gimlet

Accessories and Parts for Super-Vee

Part

Code No.

3035W-PV Plastic Carrying Case
3012D PC Plastic Cartridge
SV-25 SV-25 Cable Grippers

Similar in specification to the Super-Vee with added features: Feeds cables forwards or back, by means of a feed lever. Drives  $10 \text{mm} \, \frac{3}{8}$ " cables at 16'



# **POWER-VEE**

Order Code	Cables i	n units	Cable	BoxedWt
(Unit No/Volt. 50Hz)	m mm	ft in	Ref	kg
The following un	its include 2	cables and th	ne HECS cu	itter set
<b>PV-A-240V</b>	$7.5 \times 6$	25 x ½	25HE1	10
	$7.5 \times 10$	$25 \times \frac{3}{8}$	25HE2	
<b>PV-A-110V</b>	$7.5 \times 6$	25 x ½	25HE1	10
	$7.5 \times 10$	$25 \times \frac{3}{8}$	25HE2	

Accessories and Parts for Power-Vee

Order Part Code No.

**3035W-PV** PCC Plastic Carrying Case for Power-Vee






# Backer

Backer Electric Company Limited, founded in 1938, is the market leader in the design and manufacture of heating elements, supplying products in high volume to the majority of household brandnames, producing domestic electrical appliances, spares to parts distributors and specialist elements for use in Industrial, Catering and Commercial applications.

Backer manufactures all products to the most stringent quality control procedures, meeting all of the relevant British and European standards.

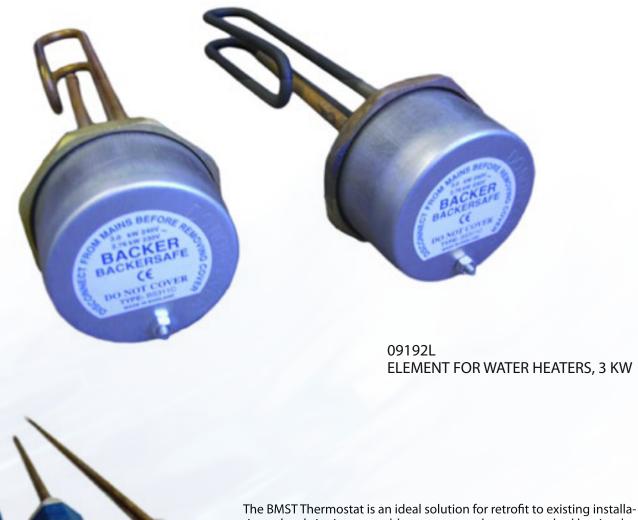



The BMST Thermostat is an ideal solution for retrofit to existing installations, thus bringing your old system up to the new standard by simply changing the thermostat.

Code

# /4" Overflow Pipe, Pushfit and Universal Fittings

Code



HDPE White Overflow	Pipe
/." v 2m langths	

R-3M



# **Bent Tank Connectors**

3/4" pushfit	R5	
19/23mm universal	R5M	



Bent Tank Connector 3/4" BSP threaded outlet

FTC1AWH



**Straight Female Coupling** 

with fixed nut

**Straight Female Coupling** with loose nut





Straight Female Coupling with fixed nut for converting male BSP outlets

to pushfit fittings

R7

R6



90° Female Coupling with loose nut

R8A



**ABS Adaptor to convert** 19mm connections up to 23mm OD pipe

R13



Reducer in ABS 11/4" plain tail to BS EN 1329-1:2000 x 19/23mm universal

connection

R16

Reducer in ABS 11/2" plain tail to BS EN 1329-1:2000 x 19/23mm universal connection

**R17** 



# **Straight Connectors**

<sup>3</sup> / <sub>4</sub> " pushfit	R1	
19/23mm universal	R1M	



# 90° Bends

<sup>3</sup> / <sub>4</sub> " pushfit	R2
19/23mm universal	R2M



135° Bends

3/4" pushfit	R2A
19/23mm universal	R2AM



3/4" Overflow Pipe, Pushfit and Universal Fittings

Tees

<sup>3</sup> / <sub>4</sub> " pushfit	R3	
19/23mm universal	R3M	



**Straight Tank Connectors** 


3/4" pushfit	R4	
19/23mm universal	R4M	



## and Pushfit Fittings 1/4" and 1 1/2"Overflow Pipe

### 11/4" and 11/2" Overflow Pipe and Pushfit Fittings



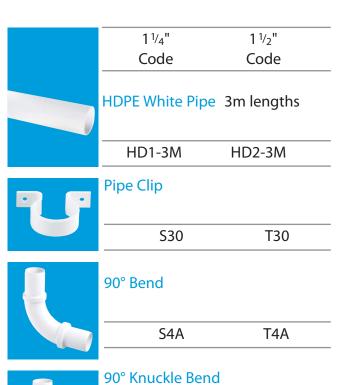








۷8


V1

T9



**S9** 

### Standing Waste Backnut Model

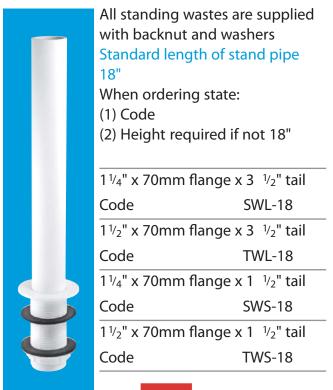

Tank Overflow





The Plumbers' First Choice



### Water Storage Cistern Fittings (Ex Bye-law 30 Fittings)



3/4"	1"	1 1/4"	1 <sup>1</sup> /2"	2"
Code	Code	Code	Code	Code

Complete Screened Tank Overflow Connector with quick release filter - standard model

R30	H28	R40	R45	-	
-----	-----	-----	-----	---	--



Complete Screened Tank Overflow Connector with quick release filter - extended model

R30E	-	R40E	R45E	-
------	---	------	------	---



**Screened Tank Breather** 

R31	-	SWLFBR	TWLFBR	ZWLFBR	



Screened Breather/Filter with compression joint to pipe

R32	-	-	-	-
-----	---	---	---	---



Tank Lid Adaptor for expansion pipe

רכם				
R K K	_	_	_	_



2 Way Expansion Pipe Adaptor

D 2 4					
R 3.4	_	_	_	_	



**Tank Connector** 

R4M	H11M	S11M	T11M	Z11M	







3/4"	1"	1 1/4"	1 <sup>1</sup> / <sub>2</sub> "	2"
Code	Code	Code	Code	Code

Complete 3/4" BL30 Kit comprising R30, R31, R33

BL30-3/4



Screened Breather/Filter/Frost Cover with compression joint to pipe

SWLFCV **TWLFCV** 



### In-Line Screened/Filter Pipe Coupling

**ZWILF RWILF HWILF SWILF TWILF** 



Frost Protection Dip Tube Bend Connect pipe to provide length of dip tube required

**S5** T5 Z<sub>5</sub>M



90° Multifit x Plain End

MS4L MT4L MZ4L



90° Multifit Bend

MS4 MT4 MZ4



### Tun Dishes and Non-Return Valves

### Tun Dishes



Tun Dish with 3/4" pushfit outlet

Code

TUN-1

The state of the s

Tun Dish with 19/23mm universal outlet

TUN-2



### One-Piece Side Inlet Tun Dish with 19/23mm universal outlet

	TUN-3
Chrome plated	TUN-3CP



One-Piece Tun Dish with 3/4" loose nut inlet x 19/23mm universal outlet

TUN-4 Chrome plated TUN-4CP



One-Piece Tun Dish with 19/23mm universal inlet x 11/4" universal outlet

TUN-6



The Plumbers' First Choice

### Non-Return Valves for WC Overflow



Tunvalve (Clear) with 3/4" female threaded inlet connection to WC overflow outlet x 19/23mm universal outlet

Code TUNVALVE



Tunvalve Straight Through (Clear) with 19/23mm universal connections

Code TUN5-CL

### Non-Return Valves



Non-Return Valve with 19/23mm universal connections

Code R28-NRV



90° Elbow with integral Non-Return Valve. Plain tail Inlet x 19/23mm universal outlet

Code R29-NRV

### In-Line Non-Return Valves



Convalve Non-Return Valve with 1 <sup>1</sup>/<sub>4</sub>" universal connections to take pressure-relief discharge from pressurised hot water cylinders

Code CONVALVE-125



### Convalve Non-Return Valve

with 1 1/4" plain tail x 1 1/4" universal outlet to take pressure-relief discharge from pressurised hot water cylinders

Code CONVALVE-125P



# WC Overflow Kits with Tun Dish and Tee Pieces

### WC Overflow Kits with Tun Dish and Tee Pieces

### WC Overflow Kits with Tun Dish - Overflow into Flush Pipe

■ Before installation relaxation of Bye-law 84 is required by local water authority



WC Overflow Kit comprises TUN-2, V33T, 90° pushfit elbow and two  $\frac{3}{4}$ " x 12" lengths of overflow pipe

■ Not suitable for use with high level cisterns

Code TUNKIT-1

WC Overflow Kit comprises TUN-3, V33T, 90° pushfit elbow and two <sup>3</sup>/<sub>4</sub>" x 12" lengths of overflow pipe

■ Not suitable for use with high level cisterns

Code TUNKIT-3



The Plumbers' First Choice

### Tee Pieces



Tee Piece 1½" BSP nut x 1½" universal x 19/23mm universal connection

Not suitable for use with high level cisterns

Code V33T



Tee Piece with universal connection to flush pipe at both ends x 19/23mm universal connection

Not suitable for use with high level cisterns

Code V33T-FP



Tee Piece 1½" BSP nut x 1½" BSP thread x 19/23mm universal connection

Not suitable for use with high level cisterns

Code V33S-22









### Anti-Syphon Traps (Silentraps)



### **Resealing Bottle Traps**



1 1/4"	1 1/2"
Code	Code

### Standard

A10R	C10R



Adjustable Inlet

Α	10AR	C10AR



Resealing Shower Trap

Code STW4-RB

■ Full range of Resealing Shower Traps see pages 24-26



Adjustable Inlet **Chrome Plated** 

C10AR-CP A10AR-CP





### Bottle Traps with 75mm Water Seal



1 1/4"	11/2"
Code	Code

### Standard



1 <sup>1</sup> / <sub>4</sub> "	1 <sup>1</sup> / <sub>2</sub> "
Code	Code

### Adjustable Inlet

AA10	-
------	---



Anti-Syphon (Silentrap)

A10V	C10V



Adjustable Inlet Basin Trap with centre pin waste

AA10W -



Resealing

A10R	C10R
------	------



38mm Water Seal

F10	G10
LIU	010



Adjustable Inlet

A10A C10	4
----------	---



Conversion Bend to convert bottle 'P' trap to 'S' trap

S1M T1M

### **Chrome Plated Bottle Traps**



Anti-Syphon (Silentrap) Adjustable Inlet

A10AV C10AV
-------------



 $1\frac{1}{4}$ "  $1\frac{1}{2}$ " Code Code

Resealing Trap Adjustable Inlet

A10AR-CP C10AR-CP



Resealing Adjustable Inlet

A10AR C10AR



Adjustable Inlet

CAA10

Adjustable Inlet to suit
32mm OD European size
CP brass waste pipe
CE31A



### Chrome Plated Basin Traps, Pipe and Wall Flange





11/4" x 50mm Water Seal Brass Adjustable Inlet Cylindrical Bottle Trap with 12" length of 32mm OD CP brass waste pipe and wall flange Code CA32MINI-CB



11/4" x 50mm Water Seal Plastic Adjustable Inlet Tubular Trap with 12" length of 32mm OD CP brass waste pipe and wall flange

Code

ode

Made in 3



TA32UK-CB

11/4" x 50mm Water Seal Plastic Adjustable Inlet Tubular Anti-Syphon Trap (Silentrap) with 12" length of 32mm OD CP brass waste pipe and wall flange

Code TA32VUK-CB



11/4" x 50mm Water Seal Brass Adjustable Inlet Square Bottle Trap with 12" length of 32mm OD CP brass waste pipe and wall flange



11/4" x 75mm Water Seal Brass Adjustable Inlet Cylindrical Bottle Trap with 16" length of 32mm OD CP brass waste pipe and wall flange Code CA32UK-CB



11/4" x 75mm Water Seal Plastic Adjustable Inlet Bottle Trap with 16" length of 32mm OD CP brass waste pipe and wall flange Code A32UK-CP



11/4" x 75mm Water Seal Brass Adjustable Inlet Bottle Trap with 16" length of 32mm OD CP brass waste pipe and wall flange Code A32UK-CB

- All kits except TA32UK-CB and TA32VUK-CB supplied with MS4-32SOLVENT fitting see pages 48 and 52
- For Chrome Plated Brass Waste Pipe and Fittings see page 52



CA32SQUK-CB

## Tubular Traps with 75mm Water Sea

### **Tubular Traps with 75mm Water Seal**



1 <sup>1</sup> / <sub>4</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2"
Code	Code	Code

Swivel 'P'

SA10 SC10 SE10



1 <sup>1</sup> / <sub>4</sub> "	1 <sup>1</sup> / <sub>2</sub> "	2"
Code	Code	Code

Low Inlet

BT3\* - -



Anti-Syphon (Silentrap)

SA10V SC10V SE10V



50mm Water Seal

BT4 - -



Adjustable Inlet

ASA10 ASC10 ASE10



Adjustable Inlet with connection for 19/23mm pipe

ASA10-SP\*ASC10-SP\*



Adjustable Inlet Anti-Syphon (Silentrap)

ASA10V ASC10V ASE10V



### Swivel 'S'

SB10 SD10 SF10



Adjustable Inlet Basin Trap with centre pin waste



### All One

SP10 TP10 ZP10



All One Anti-Syphon (Silentrap)

SP10V TP10V ZP10V



Adjustable Inlet Sink Trap with centre pin waste

FST1WP\*



All One Basin Trap with centre pin waste

SP10W\* - -







1 1/4"	1 <sup>1</sup> / <sub>2</sub> "	2"
Code	Code	Code

### Running 'P'

SR10\* TR10\* SG10\*



### Running 'S'

SS10 TS10 SH<sub>10</sub>



1 1/4" Code

Offset Basin Trap with adjustable inlet and cleaning eye

Offset Anti-Syphon

valve for cleaning

purposes

(Silentrap) Basin Trap with adjustable inlet and

removable anti-syphon

OBT1



Running suitable for most waste disposal units

TT10\*



Running with 20mm water seal

TRSH10



Adjustable Inlet with 19mm water seal

BT1 BT2



Straight Through with one cleaning eye

OBT1V

 $1\frac{1}{4}$ " Inlet x 1  $\frac{1}{4}$ " outlet X10

Straight Through Anti-Syphon (Silentrap) with one cleaning eye

11/4" Inlet x 1 1/4" outlet X10V

Straight Through with two cleaning eyes

11/4" Inlet x 1 1/4" outlet X10A 1<sup>1</sup>/<sub>4</sub>" Inlet x 1 <sup>1</sup>/<sub>2</sub>" outlet Y10

All traps marked\* available as an ti-syphon (Silentrap). Add suffix 'V' to code. See page 4 for technical details



### Domestic Appliance Traps 1 1/2" x 75mm Water Seal

### General

- Domestic Appliance Traps provide the facility to accept the discharge from a washing and/or dishwashing machine(s) and are suitable for new and existing installations
- In all cases a blank cap, plug or blank nozzle is provided with the trap. Should the domestic appliance not be connected at the time of installation, the trap will function as a normal sink trap whilst providing an easily accessible point for the future installation of any appliance(s)

### Sink Traps with connection for the discharge from domestic appliance(s)













Code WM2V



Code WM11\*



WM12\* Code



WM14\* Code



Code WM15\*



Code ASC10-CO\*

### Standpipe Trap and Fittings



Standpipe Cap with retaining clip

WM3-CAP Code



Twin Connector for plumbing two domestic appliance discharge hoses into standpipe trap

- Multifit outlet to suit either 1 1/2" or 40mm diameter standpipe
- 135° swivel nozzles for washing and/or dishwashing machine discharge hoses supplied with blanking plugs
- Discharge hose(s) to be taken to the height stated by the appliance manufacturer(s)
- An air break, as specified by appliance manufacturers is incorporated within the connector

Code V33WM



Code **WM3\*** 



- The TeeVent system, which inc orporates a non-r eturn valve, provides an air br eak and enables the waste system to be sealed. This system has the adv antage over a standpipe arr angement in that should a blockage occur, the non-return valve prevents flooding
- TeeVent fittings may be used with domestic appliance trap WM4

All domestic appliance tr aps must be fitted in acc ordance with the fixing instruc tion leaflet included

with each tr ap











TV2 can be extended away from the trap by inserting a length of 1 1/2" waste pipe between Multifit connections of the TeeVent and the trap

WM4\* Code

### Accessories



Straight Nozzle for connection to 1 1/2" Multifit

Code WMF3



90° Nozzle for connection to 11/2" Multifit

WMF4 Code



135° Nozzle for connection to 1" BSP thread

Code MA15



Blanking Plug for traps and fittings

Code 228532



Swept Tee BSP nut x BSP thread x nozzle for discharge hose of domestic appliance

1 <sup>1</sup> / <sub>2</sub> " x 1 <sup>1</sup> / <sub>2</sub> " x	3/4"	Code V33L
1 <sup>1</sup> / <sub>4</sub> " x 1 <sup>1</sup> / <sub>4</sub> " x	3/4"	Code V34L



Tee Piece BSP nut x BSP thread x 135° nozzle for discharge hose of domestic appliance

 $1\frac{1}{2}$ " x  $1\frac{1}{2}$ " x  $3\frac{4}{4}$ " Code V33S

■ When installing domestic appliance traps, care should be taken to observe the instructions of the manufacturer of the appliance, particularly with regard to the height of the discharge hose and the incorporation of an air break or vent to atmosphere



Appliance Trap and Accessories




- General
  - Space Saver Kits ar e designed to allow full use of stor age space below the sink bowl(s) and are suitable f or use with almost all British and Eur opean sinks
- All kits have 11/2" inlet connections and the provision for the discharge hose(s) of domestic appliance(s). Also supplied with an 1  $\frac{1}{2}$  x 75mm w ater seal tubular swiv el 'P' trap
- Each kit is boxed individually and supplied with an illustraative drawing




Single Bowl Kit

Code SSK1



**Double Bowl Kit** 

Code SSK2



Three Bowl Kit

Code SSK3



11/2" Space Saver Trap Inlet

Code	SSINLET1



Code SSINLET2



Plumbing Kit for adjustable height basin or sink

Code FLEXKIT1



### Kit for Adjustable Height Basin or Sink



### General

- Standard Kits have the provision for the discharge hose(s) of domestic appliance(s) and are suitable for use with almost all British and European sinks
- All kits have 1½" inlet connections and the provision for the discharge hose(s) of domestic appliance(s). Also supplied with an 11/2" x 75mm water seal tubular swivel 'P' trap
- Each kit is supplied in a polythene bag complete with an illustrative drawing



**Bowl and a Half Kit** 


**Bowl and a Half Kit** 



**Double Bowl Kit** 

Code SK1 Code SK1A Code SK2





**Three Bowl Kit** 

Code SK3



Code SK1

**Blanking Plug(s)** included with all plumbing kits

Code 228532

Standard Plumbing Kits

### Made in Britain

### Condensate Products for Connecting Condensate Discharge

### **Basin and Sink Traps**



11/4" x 75mm Water Seal Tubular Swivel Basin Trap with adjustable inlet and connection for 19/23mm pipe. Supplied with blanking cap



 $1\frac{1}{2}$ " x 75mm Water Seal Tubular Swivel Sink Trap with adjustable inlet and connection for 19/23mm pipe. Supplied with blanking cap



1½" x 75mm Water Seal Tubular Swivel Sink Trap with adjustable inlet, nozzle for discharge hose of domestic appliance and connection for 19/23mm pipe. Supplied with blanking cap

Code	ASC10-CO*



19/23mm Inlet and
Outlet x 75mm Water
Seal Offset Trap to receive
discharge from
condensing boiler.
Supplied with support clip

Code	ORT1-CO



34mm Open Inlet x
75mm Water Seal Offset
Trap x 19/23mm Outlet
to accept flexible pipe
from condensing boiler.
Supplied with support clip

All traps marked\* available as anti-syphon (Silentrap). Add suffix 'V' to code. See page 4 for technical details

### Flexible Connector from Condensing Boiler to Rigid or Flexible Condensate Discharge Pipe

- Easy connection to boiler condensate discharge pipe
- Allows for disconnection in freezing conditions for discharge to be redirected into a receptacle
- Universal connections suitable for 19/23mm rigid pipe and 25mm flexible pipe



200mm Flexible Connector

Code CONFLEX-200

300mm Flexible Connector

Code CONFLEX-300

### Flexible Condensate Pipe Kit

- For use in installation of condensing boilers
- Eliminates use of traditional rigid discharge pipe and fittings thereby allowing complete flexibility to discharge point
- Includes fittings to allow for easy connection to sanitary pipework
- Allows for disconnection in freezing conditions for discharge to be redirected into a receptacle
- Particularly useful where installation space is restricted



Flexible Condensate Pipe Kit - contents

- 1 x 3m length of 25mm flexible pipe
- 6 x 25mm pipe clips
- 2 x Straight connectors with universal connections suitable for 19/23mm rigid pipe and 25mm flexible pipe
- 1 x 1  $\frac{1}{2}$ " plain tail ABS solvent weld reducer to 19/23mm rigid pipe and 25mm flexible pipe

Code CONFLEX-KIT1



### from Condensing Boiler to Sanitary Pipework



Soakaway - Container for use with limestone chippings. External use only



110mm x 300mm x 1  $\frac{1}{4}$ " /1  $\frac{1}{2}$ " Pipe top and side Inlet Connections to receive discharge from condensing boiler. 19/23mm x 32mm solvent weld fitting provided to increase size of discharge pipe before it passes through the external wall

Code	SOAK1GR

### Mechanical Soil Pipe Boss Connectors

**Mechanical Soil Pipe Boss** Connector 57mm hole saw size. Supplied with fixing tool 4"/110mm x 1 1/4" pipe BOSSCONN110-BL Code 4"/110mm x 1 1/2" pipe Code BOSSCONN110T-BL 4"/110mm x 1 1/4" pipe Code **BOSSCONN110-GR** 4"/110mm x 1 1/2" pipe **BOSSCONN110T-GR** Code

Two-Piece Cast Iron Soil Pipe

### **Auxiliary Fittings**




Pipe Clamp to suit 1  $\frac{1}{4}$ "/1  $\frac{1}{2}$ " Pipe to BS EN 1451-1:2000 /BS EN 1329-1:2000 with universal connection for 19/23mm rigid pipe and 25mm flexible pipe

Code (Grey)	CLAMP1GR
Code (White)	CLAMP1WH




 $1\frac{1}{2}$ " x 1  $\frac{1}{2}$ " x 19/23mm Universal Slip Tee with universal connection for

Code V1MX-CO





In-line Vertical Non-Return Valve with inlet and outlet connection for 19/23mm pipe







50mm Tun Dish with 19/23mm pipe outlet

Code TUN-2



Boss Connector to suit 22mm drill siz e. Supplied with fixing tool 4"/110mm x 1 1/4" pipe Code **BOSS110C AST-BL** 4"/110mm x 1  $\frac{1}{2}$ " pipe **BOSS110T CAST-BL** Code  $3\frac{1}{2}$ "/90mm x 1  $\frac{1}{4}$ " pipe Code **BOSS90C AST-BL**  $3\frac{1}{2}$ "/90mm x 1  $\frac{1}{2}$ " pipe Code **BOSS90TCAST-BL** 3"/82mm x 1 1/4" pipe Code **BOSS82C AST-BL** 3"/82mm x 1 ½" pipe **BOSS82T CAST-BL** Code



Connector for 11/4" pipe Code BOSSCONN1.25B L Code BOSSCONN1.25GR

Mechanical Soil and

Rainwater Pipe Boss



Reducer in ABS 11/4" plain tail x 19/23mm univ ersal connection



Code R16-BL Code R16-GR



Rainwater Pipe Boss Connector for 19/23mm pipe Code **BOSSCONN-22MM** 

Mechanical Soil and



Made in **A** Britain

### Bath Traps 75mm, 60mm, 50mm and 19mm Water Seal

**Bath Traps without Overflows** 



 $1\frac{1}{2}$ " x 75mm Water Seal



1½" x 75mm Water Seal Anti-Syphon (Silentrap)



11/2" x 60mm Water Seal (Extended Body)



1½" x 60mm Water Seal (Extended Body) Anti-Syphon (Silentrap)

Code SM10EV
-------------



 $1\frac{1}{2}$ " x 50mm Water Seal

Code	SM10



 $1\frac{1}{2}$ " x 50mm Water Seal Anti-Syphon (Silentrap)

Coo	le	SM10V



 $1\frac{1}{2}$ " x 50mm Water Seal

Code	SMPTO



 $1\frac{1}{2}$ " x 50mm Water Seal Anti-Syphon (Silentrap)

Code SMP10V

 For Bath Waste Outlet Fittings suitable for use with the above Traps see pages 83-85



11/4" x 19mm Water Seal

Code	P10
1 <sup>1</sup> / <sub>2</sub> " x 19r	nm Water Seal
Code	Q10

### **Bath Trap with Top Access**

- $1\frac{1}{2}$ " x 50mm water seal swivel bath trap
- CP brass waste with top access and springloaded mushroom plug
- Matching CP mushroom plug and CP overflow face
- Adjustable flexible overflow tube length 330mm - 580mm
- Overall height of trap only 109mm




Code HC2650UK





### Bath Traps with Ov erflows



11/2" x 75mm Water Seal with flexible overflow tube and CP overflow grating

**FJ10** 

Code

11/2" x 75mm Water Seal Anti-Syphon (Silentrap) with flexible overflow tube and CP overflow grating

Code FJ10V



11/2" x 75mm Water Seal with flexible overflow tube and CP overflow grating and 70mm flange centre pin waste outlet fitting

Code FJ10WC\*



11/2" x 60mm Water Seal (Extended Body) with flexible overflow tube and CP overflow grating



11/2" x 50mm Water Seal with flexible overflow tube and CP overflow grating



11/2" x 50mm Water Seal Anti-Syphon (Silentrap) with flexible overflow tube and CP overflow grating

Code FSK10V FSK10E\* Code FSK10 Code

■ For Bath Waste Outlet Fittings suitable for use with the above traps see page 83

All traps marked\* available as anti-syphon (Silentrap). Add suffix 'V' to code. See page 4 for technical details

 $\Delta$ 



### Bath Fillers with Trap and Overflow

### General

- Filler manufactured in cast brass
- Compact filler design 70mm diameter x 25mm deep suitable for curved baths
- Will fit overflow hole size 46mm to 65mm
- 0.5 bar pressure produces 33 litres per minute 1.0 bar pressure produces 44 litres per minute 2.0 bar pressure produces 57 litres per minute
- 650mm WRAS approved braided hose with 90° bend
- All traps  $1 \frac{1}{2}$ " x 50mm water seal with Multifit outlet
- Compression overflow connection to trap

- HC2650UK-FIL has a standard overflow length of 575mm but is available with a 1m length. Incorporates a swivel bath trap and CP brass waste with top access spring-loaded mushroom plug. Overall height 109mm
- HCN3365UK has a standard overflow length of 575mm but is available with a 1m length. Incorporates a CP brass waste and springloaded mushroom plug
- HCN3165UK has a standard cable and overflow length of 575mm but is available with a 1m cable and overflow. Incorporates CP brass waste and mushroom pop-up plug

The Plumbers' First Choice






## verflow Manifold (Wasteflow)

### Overflow Manifold (Wasteflow)





### General

- Bath Wasteflow units enable the overflow and/or warning pipe from a cold water storage cistern and a WC flushing cistern (not fitted with an integral overflow) to be installed so that the discharge is directed into the bath via the bath overflow grating
- The construction of the Wasteflow is such that whilst acting as a conventional overflow for the bath, any overflow from a connected cistern is discharged through the overflow grating into the bath thereby providing a visible warning
- A feature of the Wasteflow design ensures that should the overflow grating be blocked, the overflow from the cistern is diverted to discharge directly into the bath trap and not

- back along the overflow pipe thereby reducing the risk of flooding
- Wasteflow is also available with connection for condensate or condense drain

### Advantages

- Wasteflow is available in various forms that allow greater flexibility for the discharge of cistern overflows, condensate and condense
- No unsightly external overflow pipes
- No damage to outside walls
- No risk of freezing
- No risk to other tenants or public

### Installation

- Wasteflow is supplied with a choice of 50mm, 60mm or 75mm water seal trap
- Wasteflow is installed under the roll of the bath
- Wasteflow fittings shown on page 20 enable a range of connections that may be housed within the roll of the bath or if necessary extended into a duct space
- Overflow pipes connected to Wasteflow should have an adequate and continuous fall to ensure a natural gravity discharge



Wasteflow with pop-up waste and trap: CP brass control knob: CP stainless steel waste flange and plug


With L10 Trap	PUWF3-CP*
With SM10E Trap	PUWF2-CP*



Wasteflow with trap

FJWF1*
FSKWF1*
WF1

Bath Waste Outlet Fittings see page 83



Wasteflow with 1 ½" waste outlet fitting, plug, chain and two way connector

Code WF21

■ Wasteflow Manifolds have a 1  $\frac{1}{2}$ " BSP male thread on the inlet and will normally require an additional fitting from the list on page 20



### Overflow Manifold (Wasteflow) Chrome Plated Bath Trap with Overflow

Wasteflow



Wasteflow can be fitted with R11, R12 or R15 connector (order as required) for connection to overflow warning pipe. Side inlet connection for 19/23mm condensate or condense drain

Code WF21-SP

### Wasteflow Fittings



Straight Connector  $1\frac{1}{2}$ " loose nut x connection for 19/23mm pipe

Code R11



Four Way Connector  $1\frac{1}{2}$ " loose nut x four connections for 19mm pipe, supplied with three plugs

Code R12



ABS Adaptor to convert 19mm connections on R12 and R15 fittings up to 23mm OD pipe

Code R13



3/4" In-Line Non-Return Valve

Code R14



2 Way Connector 1½" loose nut x two connections for 19mm pipe, supplied with one plug

Code R15

See page 63 for WC Overflow Kits with Tun Dish

### Chrome Plated Brass Bath Traps with Combined Waste and Overflow



 $1\frac{1}{2}$ " x 50mm Water Seal CP Brass Trap :  $1\frac{1}{2}$ " CP brass combined waste and overflow with 70mm spring-loaded mushroom plug and matching overflow face

Code BRASSTRAP-50-CP

 $1\frac{1}{2}$ " x 25mm Water Seal CP Brass Trap :  $1\frac{1}{2}$ " CP brass combined waste and overflow with 70mm spring-loaded mushroom plug and matching overflow face

Code BRASSTRAP-25-CP



### 110mm x 50mm Water Seal Pushfit Traps, Urinal **Bowl Syphonic Traps and Condensation Trap**

### 110mm x 50mm Water Seal **Pushfit Traps**

Pushfit Traps are manufactured in high density polyethylene and the inlet and outlet sealing rings from a proven synthetic rubber compound. Pushfit traps will suit WC squatting pans, slop hoppers or similar appliances with 90-114mm plain end outlet and will connect to 110mm pipe



Code WCTRAP4P



WCTRAP4S Code

### **Urinal Bowl Syphonic Traps**

Syphonic Traps have inlets to suit continental style syphonic urinal bowl to create a 75mm water seal trap. Outlet to suit 2" BS EN 1329-1:2000 solvent weld pipe



Syphonic 'P' Trap

Code



Syphonic 'S' Trap

Code



Condensation Trap has been designed as a straight socket connector for 110mm and 125mm pipe (commonly used as ducting for basic air extraction systems) and provides an internal trap/diverter which will collect condensation forming on the internal surface of the extract pipework. It allows for the connection of a 19/23mm pipe, which can be installed to drain off the condensation to a convenient position

MALPINE



110mm pipe

Code

125mm pipe

Code CONTRAP2





### 90mm Shower Traps with 50mm Water Seal

90mm Shower Traps with 50mm Water Seal and removable 113mm Flange to

**CP Plastic Flange** 

**CP Brass Flange** 

**CP Brass Flange** 

90mm x 50mm Water Seal with 1

1/2" Multifit Outlet

Overall height 70mm





ST90CP10-70

ST90CB10-70

ST90CPB-P-70

90mm x 50mm Water Seal with 1 1/2" Multifit Outlet Overall height 82mm







ST90CP10

ST90CB10

ST90CPB-P

90mm x 50mm Water Seal with 1 1/2" Multifit Outlet High-flow high-performance trap. Over all height 85mm







ST90CP10-HP2

ST90CB10-HP2

ST90CPB-P-HP2

90mm x 50mm Water Seal with 2" Multifit Outlet High-flow high-performance trap. Over all height 85mm







ST90CP10-HP

ST90CB10-HP

ST90CPB-P-HP

90mm x 50mm Water Seal with 2" Universal Vertical Outlet Overall height 108mm







ST90CB10-V

ST90CPB-P-V



### facilitate easy cleaning

**CP Brass Flange** 

White Plastic Flange

90mm x 50mm Water Seal with 1  $\frac{1}{2}$ " Multifit Outlet Overall height 70mm



ST90CPB-S-70

ST90WH10-70

90mm x 50mm Water Seal with 1 1/2" Multifit Outlet Overall height 82mm





ST90CPB-S

ST90WH10

90mm x 50mm Water Seal with 1  $\frac{1}{2}$ " Multifit Outlet High-flow high-performance trap. Over all height 85mm





ST90CPB-S-HP2

ST90WH10-HP2

### 90mm x 50mm Water Seal with 2" Multifit Outlet High-flow high-performance trap. Over all height 85mm





ST90WH10-HP

Do not pour drain cleaner down these products

90mm x 50mm Water Seal with 2" Universal Vertical Outlet Overall height 108mm





ST90CPB-S-V

ST90WH10-V



### №1 1/2" Shower Traps with Top Access

### Traps with Standard Waste and Flange

- Waste grid and dip tube removable from top to facilitate easy cleaning
- 1½" Multifit outlet

Do not pour drain cleaner down these products

- 70mm or 85mm standard waste and flange - white plastic, CP plastic or CP brass
- Gold plated wastes and grids only supplied as separate items - see page 27

70mm White Plastic Flange 85mm White Plastic Flange

### 19mm Water Seal Trap

Overall height 95mm





STW1-R

STW5-R

50mm Water Seal Trap







STW2-95

STW6-95

### 50mm Water Seal Resealing Trap

Overall height 118mm





STW2-R

STW6-R

### 80mm Water Seal Resealing Trap

Overall height 154mm





STW9-R

STW11-R



70mm CP Plastic Flange

85mm CP Plastic Flange

70mm CP **Brass Flange** 

85mm CP **Brass Flange** 

19mm Water Seal Trap

Overall height 95mm









50mm Water Seal Trap

Overall height 95mm









50mm Water Seal Resealing Trap

Overall height 118mm









80mm Water Seal Resealing Trap

Overall height 154mm









STW10-RB

STW12-RB



### with Top Access 11/2" Shower Traps

### 1 1/2" Shower Traps with Top Access

### Traps with Waste and Mushroom Flange

- Mushroom flange and dip tube removable from top to facilitate easy cleaning
- 11/2" Multifit outlet

■ 70mm or 85mm mushroom flange available in white plastic or CP stainless steel complete with standard locking nut

70mm White Plastic Mushroom Flange

85mm White Plastic Mushroom Flange

70mm CP Stainless Steel Mushroom Flange

85mm CP Stainless Steel Mushroom Flange

19mm Water Seal Trap Overall height 95mm









STW1-M

STW5-M

STW3-M

STW7-M

50mm Water Seal Trap Overall height 95mm









STW2M-95

STW6M-95

STW4M-95

STW8M-95

50mm Water Seal Resealing Trap Overall height 118mm









STW2-M

STW6-M

STW4-M

STW8-M

80mm Water Seal Resealing Trap

Overall height 154mm









STW9-M STW11-M

STW10-M

STW12-M

### 70mm Shower Trap and Shower Trap Accessories



70mm x 25mm Water Seal Trap with Top Access: 85mm CP Stainless Steel Mushroom Flange with 1 1/2" BS EN 1329-1:2000 solvent weld outlet. Overall height 50mm

Code ST70SS85

■ Only suitable for shower trays with a 70mm waste outlet

### Standard Waste with grid to suit tray with maximum thickness of 22mm









White Plastic STW70WH STW85WH

**CP Plastic** STW70CP STW85CP

**CP Brass** STW70CPB STW85CPB

**GP Plastic** STW70GP STW85GP

Long Waste with grid to suit tray with maximum thickness of 29mm

Grid only



The Plumbers' First Choice











White Plastic STW70WHL STW85WHL

**CP Plastic** STW70CPL STW85CPL White Plastic STWGR-WH

**CP Plastic** STWGR-CP

**GP Plastic** STWGR-GP

### Standard Locking Nut to suit tray with maximum thickness of 22mm



STW70LN

STW85LN

Long Locking Nut to suit tray with maximum thickness of 29mm

### Mushroom Flange



White Plastic

STW70WHM STW85WHM



**CP Stainless** Steel STW70SSM

STW85SSM

STW70LN L STW85LN L





### Trap Washers, Bath and Shower Trap Accessories Exporting Company Ltd





1 1/4"	1 1/2"	2"
Code	Code	Code



Rubber Seal to suit ST90 dip tube

### Trap Inlet

RW1	RW2	RW3



Rubber 'O' Ring Seal to suit STW dip tube



Washer

Blue

PWM1


Multifit Rubber Olive

**Multifit Plastic Friction** 



P-OR-SHOWERTRP

P-RW-STW90



19mm water seal

STW19-TUBE

50mm water seal

STW50-TUBE

80mm water seal

STW80-TUBE



**Rubber Washer** 

For A10 CUP	ARW10
For C10 CUP	CRW10
For E10 CUP	RW3

Red

PWM2

Green

PWM3



113mm CP Plastic Flange to

suit ST90 Trap. Supplied complete with dip tube



Blanking Plug, Nut and Washer for L10, SM10, SM10E bath traps

	•	
Code	L10PLUG	
Code	SM10PLUG	
Code	SM10EPLUG	



Long Waste for ST90CP10, ST90CB10 and ST90WH10 traps. To suit tray with maximum thickness of 25mm

ST90W/BODY-L

ST90CPTOP+TUBE

### **Multifit Waste Fittings**



1 1/4"	<b>1</b> <sup>1</sup> / <sub>2</sub> "	2"
Code	Code	Code

### 90° Bend

MS4 MT4 MZ4



90° Bend Multifit x European pipe size

x 32mm x 40mm x 50mm MS4-ISO MT4-ISO MZ4-ISO



90° Bend Multifit x 32mm European pipe size ring seal pushfit

MS4-32MM - -



90° Bend ABS solvent weld x 32mm European pipe size ring seal pushfit

MS4-32SOLVENT -



90° Bend Multifit x plain end\*

MS4L MT4L MZ4L



135° Bend

MS20 MT20 MZ20



Multifit Waste Fittings

135° Bend Multifit x plain end\*

MS20L MT20L MZ20L



**Straight Connector** 

S28M T28M Z28M



Straight Connector 11/4" x 11/2"

- ST28M



11/4" 11/2" 2"
Code Code Code

traight Connector Multifit x

Straight Connector Multifit x European pipe size

 x 32mm
 x 40mm
 x 50mm

 S28L-ISO
 T28L-ISO
 Z28L-ISO

 x 40mm

 ST28L-ISO

Adjustable Straight Connector



MS18E M T18E M Z18E



Straight Connector Multifit x plain end\*

MS18L MT18L -



Swept Tee

V8M V1M V15M



 $1\frac{1}{2}$ " Equal Slip Tee with universal connections

- V1MX -



Reducer for Fittings \*



 $\frac{1\frac{1}{2}" \times 1^{\frac{1}{4}"}}{2" \times 1^{\frac{1}{4}"}}$  T12M - ZS26L 2" x 1 \frac{1}{2}" - ZT26L




2" x 19/23mm - TUN-2









ST90-OUT


















### Flexible Waste Fittings and Non-Return Valves

Flexible Connector offers maximum flexibility when conventional fittings cannot be used

- Maximum effective length 18"
- Plain spigot to suit Multifit and universal outlet traps or waste fittings
- Universal outlet connection



1 1/4"	1 <sup>1</sup> / <sub>2</sub> "	2"
Code	Code	Code
FLEXCON1	FLEXCON2	-

### Flexible Fittings

 These fittings offer complete flexibility for any required angle or offset



Universal Connection x Universal Connection FLEXCON3 FLEXCON4 FLEXCON7

Universal Connection x PVC Plain Spigot suitable for solvent welding to pipe BS EN 1329-1:2000

FLEXCON5 FLEXCON6

FLEXCON8

### Non-Return Valves



 $1\frac{1}{4}$ "  $1\frac{1}{2}$ " 2" Code Code

In-Line Non-Return Valve with 1½" universal connections and top access for cleaning

T28M-NRV



In-Line Non-Return Valve with 2" universal connections and top access for cleaning

- - Z28M-NRV



In-Line Non-Return Valve with 2" BS EN 1329-1:2000 solvent weld connections and top access for cleaning

- - Z28M-NRVS

 Non-Return Valves are designed to prevent a back flow of water. They must only be used when there is no alternative and on the basis that they are cleaned regularly



The Plumbers' First Choice



### Sundry Fittings

### **Sundry Fittings**

### **Sundry Fittings**



1 1/4"	1 1/2"	2"
Code	Code	Code

90° Bend with BSP male thread x BSP coupling nut

S1	T1	Z1



BSP Nut or	dinary	
S8A	T8A	Z8A

S8B T8B Z8B



Compression Ring for Imperial Copper

S13	T13	-




BSP Coupling to BS EN 1329-1:2000 ABS or PVC pipe, must be solvent welded

S25	T25	-



**Trap Inlet Reducer** 





Blank Cap with nut for BSP threads

S23	T23	Z23



7" Extension Piece effective length 5". Available longer or shorter on application

S22L T22L -	
-------------	--

### BSP Female x BSP Male Couplings



	I '/4	I '/2
	Code	Code
BSP Coupli	ng	
1" length	S12A-1	T12A-1
2" length	S12A-2	T12A-2
3" length	S12A-3	T12A-3



BSP Coupling flush spigot European to UK waste adaptor

S12A-F	T12A-F
--------	--------

T12



**BSP Coupling** 

1 <sup>1</sup> / <sub>4</sub> " x 1"	S12C	-
1" x <sup>3</sup> / <sub>4</sub> "	S12D	-



BSP Coupling waste outlet reducer

BSP Coupling		
1 <sup>3</sup> / <sub>4</sub> " x 1 <sup>1</sup> / <sub>2</sub> "	-	T12B
2" x 1 ½"	-	T12C
2" x 1 <sup>1</sup> / <sub>4</sub> "	-	T12D
1 <sup>1</sup> / <sub>2</sub> " x 1"	-	T12H



**BSP Coupling** 

 $1\frac{1}{2}$ " x  $1\frac{1}{4}$ "

Na.	4	•	2

1½" x 2" - T12E 1½" x 1¾" - T12F



The Plumbers' First Choice



### Chrome Plated Brass Waste Pipe and Fittings

	32mm Code	35mm Code	42mm Code
	1m length of CP Brass Pip European pipe size	e 1 1/4" UK pipe size	1 ½" UK pipe size
	PIPE32-1000-CB	PIPE35-1000-CB	PIPE42-1000-CB
	CP Pipe Clip		
	S32-CP	S35-CP	T42-CP
	90° Compression Bend		
	32A-CB	35A-CB	42A-CB
Į.	135° Compression Bend		
	-	35B-CB	42B-CB
The second	Compression Tee		
	-	-	42E-CB
	Compression Straight Cor	nnector	
	32G-CB	35G-CB	42G-CB
6	Wall Flange		
	WALLFLANGE-CP32	WALLFLANGE-CP35	WALLFLANGE-CP42
~ ~	Synthetic Rubber Seal Rec	ducers for above fittings	
		R/SEAL-35X32	R/SEAL-42X32
			R/SEAL-42X35
	ABS Solvent Weld Adaptor plastic solvent weld waste		to BS EN 1329-1:2000
	ABSCON-32X1.25	ABSCON-35X1.25	ABSCON-42X1.5



Code ABS32/35A-CB



Multifit

Code MS4-32MM



Straight Connector 32/35mm compression CP br ass x 1 1/4" ABS solvent weld

Code ABS32/35G-CB



90° Bend 32mm Eur opean pipe size ring seal pushfit x 1 1/4" ABS solvent weld

Code MS4-32SOLVENT

■ For Multifit fittings suitable for use with 35mm and 42mm external diameter pipe see pages 48 and 49

■ For Chrome Plated Traps see pages 6, 7 and 20



### The Plumbers' First Choice

### Surefit Waste System



1 <sup>1</sup> / <sub>4</sub> "	1 1/2"	2"
Code	Code	Code

### **HDPE White Pipe 3m lengths**

HD2-3M HD1-3M HD3-3M



### Pipe Clip

S30	T30	Z30



### 90° Bend

S4L	T4L	Z4L



### 135° Bend

S20L T20L -	
-------------	--



### Straight Connector

S18L T18L Z18I	
----------------	--



Straight Connector Multifit x Surefit

S28L	T28L	Z28L



Reducer  $1\frac{1}{2}$ " to  $1\frac{1}{4}$ "



### Blank Cap without nut

	T23I	723L
JZJL	IZJL	2236



### Reducer for Fittings

2"-1 1/4"	1 1/2"-1 1/4"	2"-1 1/2"
S26L	T12S	T26L



1 1/4"	1 ½"
Code	Code

### **Swept Tee**

V8L V1L



### **Swept Tee**

1½" x 1½" x 1½" V21L



Swept Tee Surefit x 19mm pushfit branch

I 1/2" X I 1/2" X 3/4"	-	V23L
1 <sup>1</sup> / <sub>4</sub> " x 1 <sup>1</sup> / <sub>4</sub> " x <sup>3</sup> / <sub>4</sub> "	V24L	-



Swept Tee BSP nut x BSP thread x nozzle for discharge hose of domestic appliance

$1^{1/2}$ " x $1^{1/2}$ " x $3^{1/4}$ "	-	V33L
1 <sup>1</sup> / <sub>4</sub> " x 1 <sup>1</sup> / <sub>4</sub> " x <sup>3</sup> / <sub>4</sub> "	V34L	-



Tee Piece BSP nut x BSP thread x 135° nozzle for discharge hose of domestic appliance

1 ½" x 1 ½" x 3/4"		V33S
1 1/4"	1 1/2"	2"
Code	Code	Code



90° Connector to soil pipe boss BS EN 1451-1:2000 size\*

S4M	T4M	-



135° Connector to soil pipe boss BS EN 1451-1:2000 size\*

S20M	T20M	-
------	------	---



Straight Connector to soil pipe boss BS EN 1451-1:2000 size\*



Wall Flange for HDPE pipe

S17	T17	-
-----	-----	---

- \*BS 5254 size if connecting to boss size BS 5255 add 5255 to code e.g. S4M 5255
- Surefit waste fittings only suitable for M CAlpine HDPE waste pipe





### Drain Connectors and Blanking O ff Caps

- Manufactured in polypropylene
- Finned seal spigot for internal connection to cast iron, plastic or clay 4"/110mm pipe



4"/110mm x 4"/110mm Connector with 'O' seal socket to fit 4"/110mm pipe to BS 4514 Code (Black) DC1-BL Code (Grey) DC1-GR With 14mm offset

VVICII	1411111 011361	
$\overline{Codo}$	(Black)	

Code (Black)	DC1BL-OS
Code (Grey)	DC1GR-OS

### **Drain Connector with Boss**



4"/110mm x 4"/110mm Connector with 'O' seal socket to fit 4"/110mm pipe to BS 4514 and 11/2" universal pipe boss including blanking cap

Code (Black)	DC1-BL-BO
Code (Grey)	DC1-GR-BO

### Drain Connector 90° Bend



90° Bend 4"/110mm x 4"/110mm with 'O' seal socket to fit 4"/110mm pipe to BS 4514

Code (Black)	DC90-BL
Code (Grey)	DC90-GR

- Ideal for low level connections
- Reducers allow for connection to BS EN 1451-1:2000 and BS EN 1329-1:2000 pipe



4"/110mm Reducer Connector with sealing ring to fit to plastic waste pipe

	Code
11/4" and 11/2"	DC2-BL
2"	DC3-BL



4"/110mm Reducer Connector with offset sealing ring to fit to plastic waste pipe

11/4" and 11/2"	DC2BL-OS
2"	DC3BL-OS



4"/110mm Blanking Cap suitable for sealing cast iron, plastic or clay 4"/110mm pipe

Code	DC4-BL

### Temporary Blanking Off Caps

S23MR



Synthetic Rubber Cap for sealing

110mm pipe		
Code		CAP100
1½" Code	1½" Code	2" Code
Synthetic Rubber Cap for waste pipe		

T23MR

Z23MR



# Mechanical Soil P ipe Boss Connectors

- Suitable for waste water and condensate discharge
- Simple dry fixing mechanical connection
- Mechanical Soil Pipe Boss Connectors to suit 57mm hole saw size





4"/110mm x 1  $\frac{1}{4}$ " pipe BOSSCONN110-BL Code 4"/110mm x 1 1/2" pipe BOSSCONN110T-BL Code 4"/110mm x 2" pipe Code BOSSCONN110Z-BL 3''/82mm x  $1^{-1}/_{4}''$  pipe **BOSSCONN82-BL** Code 3''/82mm x  $1^{-1}/_{2}''$  pipe Code **BOSSCONN82T-BL** 3"/82mm x 2" pipe BOSSCONN82Z-BL Code



4"/110mm x 1 1/4" pipe BOSSCONN110-GR Code 4"/110mm x 1  $\frac{1}{2}$ " pipe Code BOSSCONN110T-GR 4"/110mm x 2" pipe Code BOSSCONN110Z-GR  $3"/82mm \times 1 \frac{1}{4}"$  pipe **BOSSCONN82-GR** Code 3"/82mm x  $1 \frac{1}{2}$ " pipe Code **BOSSCONN82T-GR** 3"/82mm x 2" pipe Code BOSSCONN82Z-GR

- Universal connection for pushfit or solvent weld waste pipe
- All boss connectors supplied with fixing tool

Two-Piece Cast Iron Soil Pipe Boss Connector to suit 22mm drill size for CONDENSATE DISCHARGE ONLY



4"/110mm x 1 1/4" pipe Code BOSS110CAST-BL 4"/110mm x 1 ½" pipe Code BOSS110TCAST-BL

 $3\frac{1}{2}$ "/90mm x 1  $\frac{1}{4}$ " pipe Code **BOSS90CAST-BL**  $3\frac{1}{2}$ "/90mm x 1  $\frac{1}{2}$ " pipe Code **BOSS90TCAST-BL** 

3"/82mm x 1 1/4" pipe Code **BOSS82CAST-BL**  $3"/82mm \times 1 \frac{1}{2}"$  pipe Code BOSS82TCAST-BL

## Mechanical Soil and Rainwater Pipe **Boss Connectors**



Mechanical Soil and Rainwater Pipe Boss Connector for 1 1/4" pipe



Code BOSSCONN1.25BL Code BOSSCONN1.25GR



Reducer in ABS 11/4" plain tail x 19/23mm universal connection Code R16-BL Code R16-GR



Mechanical Soil and Rainwater Pipe Boss Connector for 19/23mm pipe Code **BOSSCONN-22MM** 

## Threaded Boss Connectors



Straight Connector 2" BSP male thread x Multifit

2" BSP x 1 1/4" Multifit	ZS31M
2" BSP x 1 ½" Multifit	ZT31M
2" BSP x 2" Multifit	Z31M



# Aluminium R oof Flashing (MacFlash)

## General

- MacFlash Aluminium Roof Flashing offers an alternative to traditional lead roof slates
- The aluminium flashing is manufactured from high grade aluminium and the collar from synthetic rubber, both to British Standards. The collar is die-formed to the aluminium flashing

## **Advantages**

- MacFlash is quickly and easily installed and offers cost savings in material and labour
- MacFlash is suitable for flat roofs and for roof pitches up to 45°
- MacFlash has special corrugations that can be easily dressed to form a seal
- MacFlash can be used with flue pipes from condensing boilers

Nominal Pipe Size 4"/110mm pipe Base Measurements 18" x 18"

Nominal Pipe Size 3"/75mm pipe Base Measurements 18" x 18"

RS1 Code

Code

RS4

Nominal Pipe Size 4"/110mm pipe Base Measurements 18" x 24"

Nominal Pipe Size 2"/50mm pipe Base Measurements 18" x 18"

Code RS2

RS7 Code

Nominal Pipe Size 4"/110mm pipe Base Measurements 24" x 24"

Code RS3












## POLYGIENE ANTI VIRAL SEATS



Celmac is a leading brand of CME Sanitary Systems Limited, recognised throughout the world. The unique range of products within the Celmac Toilet Seat Collection is made possible by the combined manufacturing capabilities of specialist sites in England and abroad.

The Celmac toilet seats and covers shown below have been fully impregnated with Polygiene™. This is particularly important for use in hospitals, care homes, public buildings, fast food restaurants, hotel chains, airports, mass-transit facilities and other public areas as well as in domestic homes. Polygiene™ contains pathogen killing properties which are proven to be effective in the control of SARS-coronavirus (SARS-CoV). Why take the risk - use Polygiene™.

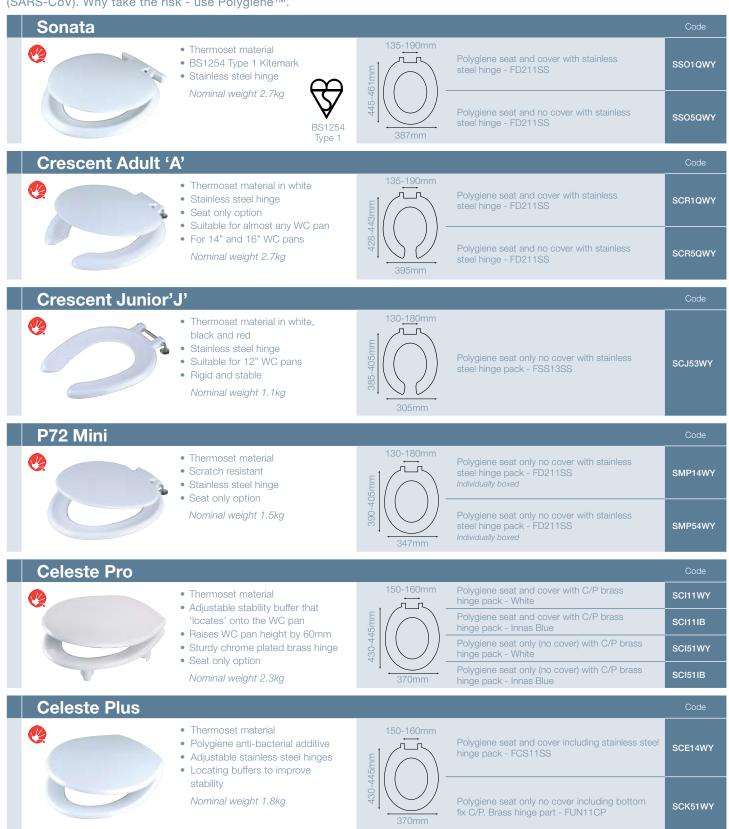





Concerto chrome plated smooth close hinge



Tango plastic colour matched smooth close hinge




Monarch chrome plated smooth close hinge

SMH1SWH

Manufactured using gel filled dampers, which allows the seat and cover to close slowly and silently without slamming. All the systems are equipped with a bypass system, which will stop any damage or breakage occurring should the seat or cover be forced shut against the smooth closing action, helps prevent children's fingers being caught.

## Tango 140-160mm Polypropylene material Medium weight seat and wrap over domed cover Seat and cover including smooth close Smooth close colour matched pre-assembled plastic hinges Nominal weight 1.7kg 347mm Maestro Thermoset material Total wrap over cover and distinctive Seat and cover including smooth close hinge SMA1SWH European D shaped design Smooth close colour matched plastic hinge Nominal weight 2.3kg Concerto 135-190mm Thermoset material Classic domed design Seat and cover including smooth close hinge SC01SWH Sturdy chrome plated brass smooth close hinge Nominal weight 2.1kg FUS11CP Smooth close hinge NEW Delta 100-165mm Thermoset material • Overlaying 'sandwich' design cover and distinctive European D shaped design Seat and cover including smooth close hinge SWD1SWH • Chrome plated brass, smooth close hinges Easy clean Nominal weight 2.3kg 360mm Monarch Polyester material

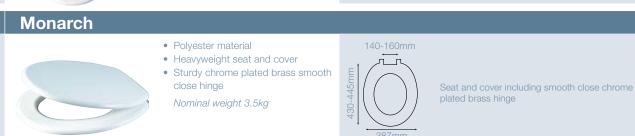


## celmac

## THERMOPLASTIC SEATS



# • Study chlorine plated brass hinge • Seat only option Nominal weight 2.3kg • Thermoset material • Polygiene anti-bacterial additive • Adjustable stainless steel hinges • Locating buffers to improve stability Nominal weight 1.8kg • Scistwy hinge pack - White Polygiene seat and cover with C/P brass hinge pack - White Scistwy hinge pack - White Polygiene seat and cover including stainless steel hinge seat and cover including stainless steel hinge pack - FCS11SS Polygiene seat and cover including stainless steel hinge pack - FCS11SS Polygiene seat only no cover including bottom fix C/P. Brass hinge part - FUN11CP SCK51WY






## celmac

## **COMPOSITE SEATS**



## celmac

## **REALWOOD SEATS**

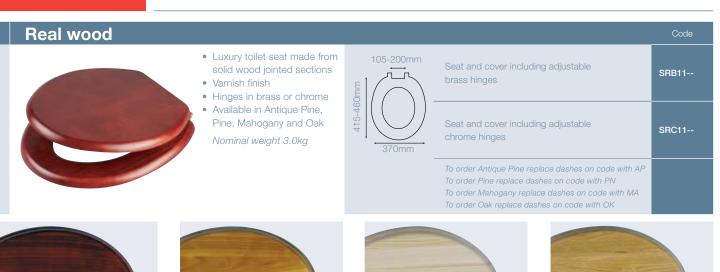









Mahogany Antique Pine

Stainless steel

hinge pack

Hinges

Colour matched

top fix plastic hinge

top fix hinge pack

FBH11SS


Universal bottom fix C/P

brass hinge pack FUN11CP

#### **Maxime** Thermoset material Stainless steel mounting Universal hinge Seat and cover including stainless SMM11WH Contemporary wrap over styling steel hinge pack - FMN11SS Nominal weight 3.1kg Nadix 130-<u>177</u>mm Thermoset material · Stainless steel mounting Universal hinge Seat and cover including stainless steel hinge pack - FMN11SS SNX11WH • Ergonomic dish design cover Nominal weight 2.3kg Maestro Seat and cover including concealed Thermoset material SMA18WH stainless steel hinge pack - FDR11SS Total wrap over cover and distinctive European D shaped design Alternative hinge options: FQB11---Sturdy, adjustable stainless Top fix quick release plastic hinge steel hinges Alternative hinge options: Nominal weight 2.3kg FDT11CP Top fix chrome plated brass hinge Top fix CP brass Concealed stainless Top fix quick release Hinges steel hinge FDR11SS plastic hinge FQB11-hinge FDT11CP Rondo 125-170mm Thermoset material Seat and cover including concealed SRD18WH stainless steel hinge pack - FDR11SS Flat cover fits perfectly over the seat to create smooth lines Alternative hinge options: Easy to clean FQB11--Sturdy, adjustable stainless steel hinges Alternative hinge options: FDT11CP Nominal weight 2.1kg Top fix chrome plated brass hinge Concealed stainless Top fix quick release Top fix CP brass Hinges hinge FDT11CP steel hinge FDR11SS plastic hinge FQB11--Regent 125-170mm Thermoset material Seat and cover including concealed SRG18WH Domed wrap-over cover fits perfectly лα stainless steel hinge pack - FDR11SS over the seat to create smooth lines Alternative hinge options: Easy to clean FQB11--Top fix quick release plastic hinge Sturdy, adjustable stainless steel hinges Alternative hinge options: FDT11CP Top fix chrome plated brass hinge Nominal weight 2.1kg Concealed stainless Top fix CP brass Top fix quick release Hinges steel hinge FDR11SS plastic hinge FQB11-hinge FDT11CP Concerto Thermoset material Seat and cover including dual position 135-190mm plastic pillar hinge pack- FDP11- Classic domed design Plastic, stainless steel and chrome Alternative hinge options: FTF11-plated brass hinge options Colour matched plastic top fix Nominal weight 2.1kg Alternative hinge options: Stainless steel FBH11SS top fix hinge Alternative hinge options: Universal bottom fix C/P brass hinge FUN11CP

## THERMOSET SEATS



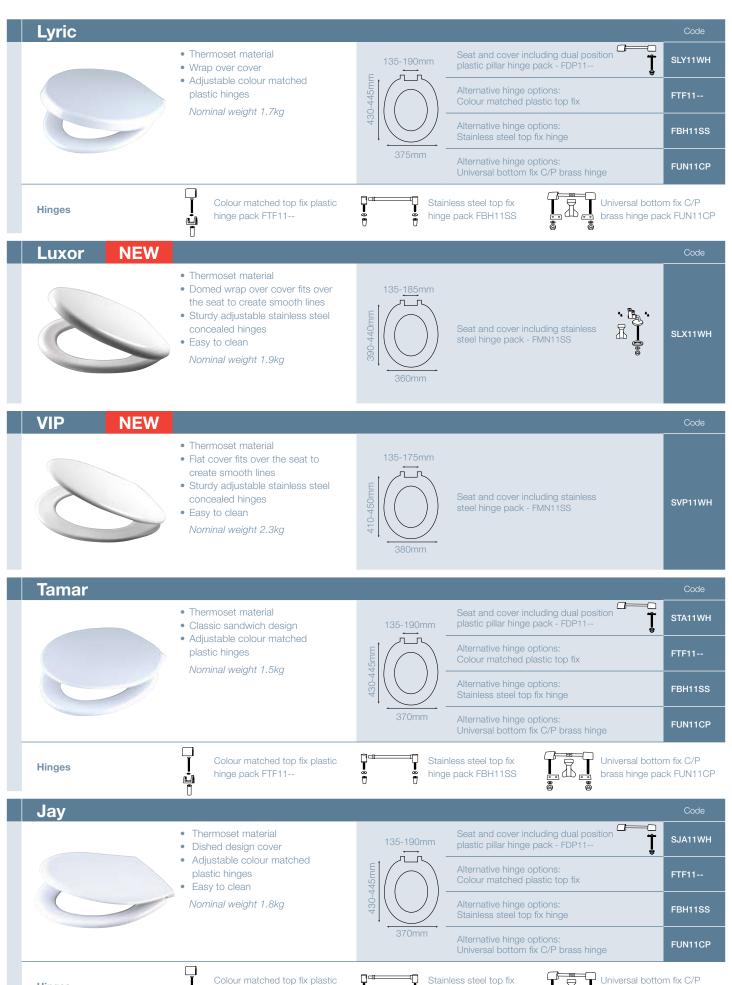

Hinges

Colour matched top fix plastic hinge pack FTF11--




Stainless steel top fix hinge pack FBH11SS




## celmac

## THERMOSET SEATS

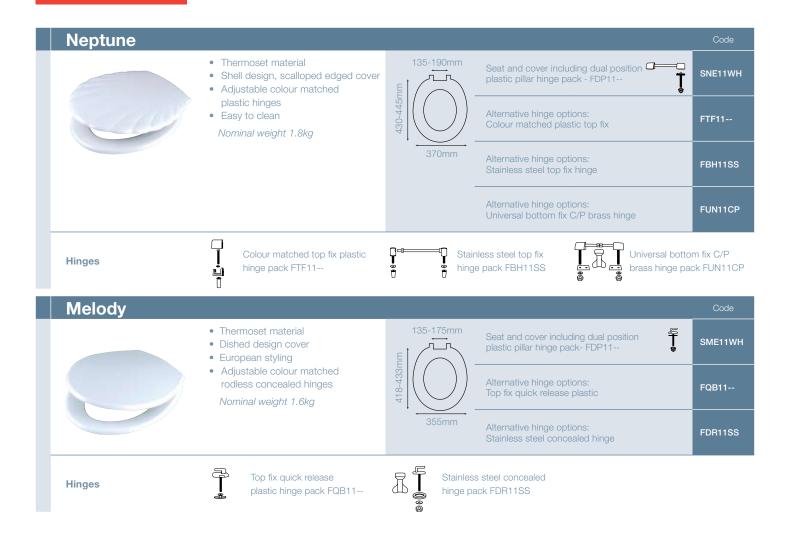


## celmac

## COMMERCIAL THERMOSET SEATS

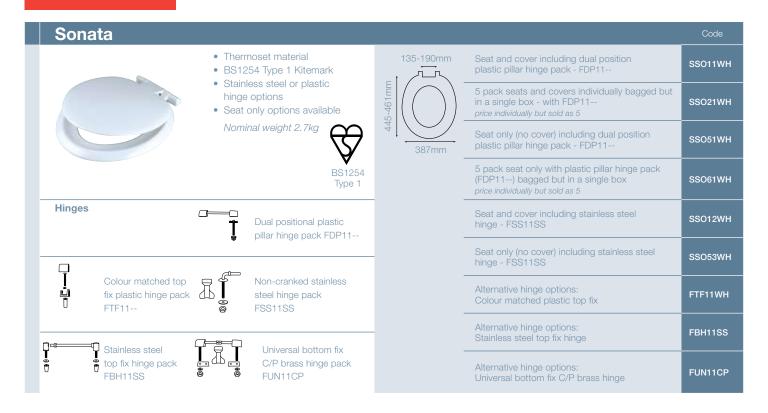



## COMMERCIAL THERMOSET SEATS

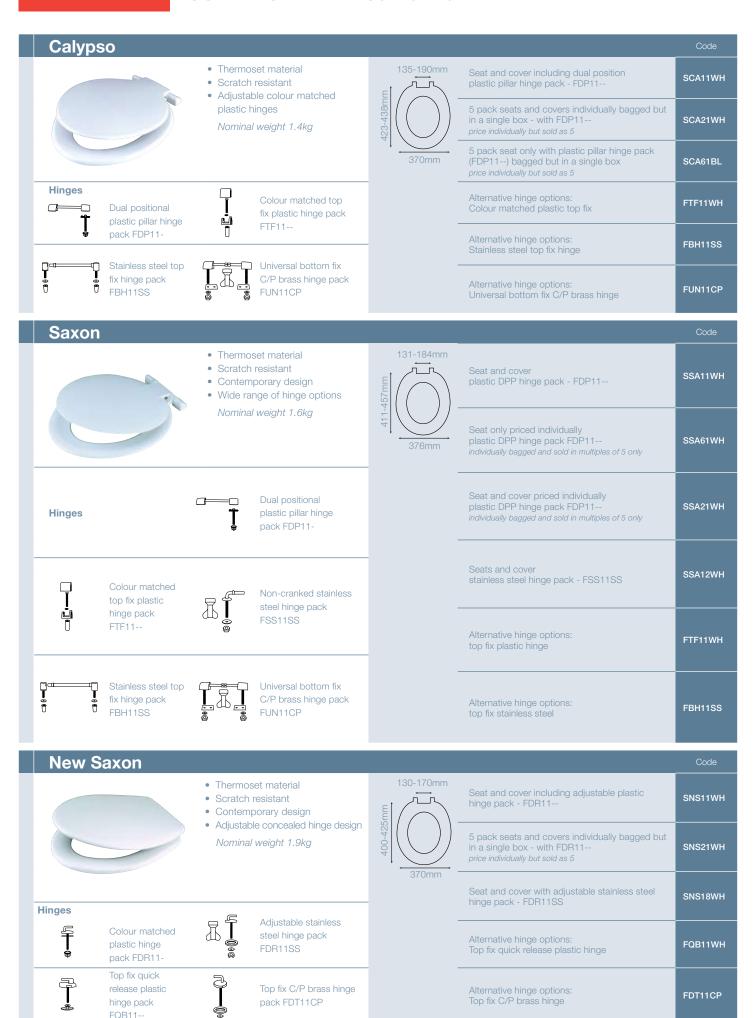

## COMMERCIAL THERMOSET SEATS

#### Crescent Adult 'A' · Thermoset material in white 135-190mm Seat and cover including dual position plastic pillar hinge pack - FDP11-and black · Multiple stainless steel or plastic hinge options · Seat only option Seat and cover including stainless steel Suitable for almost any WC pan hinge - FSS11SS For 14" and 16" WC pans Nominal weight 2.7kg Seat only (no cover) including dual position SCR51WH plastic pillar hinge pack - FDP11--Hinges Seat only (no cover) including stainless steel Colour matched top Non-cranked SCR53WH hinge - FSS11SS fix plastic stainless steel hinge pack hinge pack FTF11--FSS11SS Alternative hinge options: FTF11--Colour matched plastic top fix Dual positional C/P brass pillar hinge plastic pillar hinge pack FD211SS pack FDP11--Alternative hinge options: FBH11SS Stainless steel top fix hinge Stainless steel Universal bottom top fix hinge pack fix C/P brass hinge Alternative hinge options: FUN11CP Universal bottom fix C/P brass hinge FBH11SS pack FUN11CP

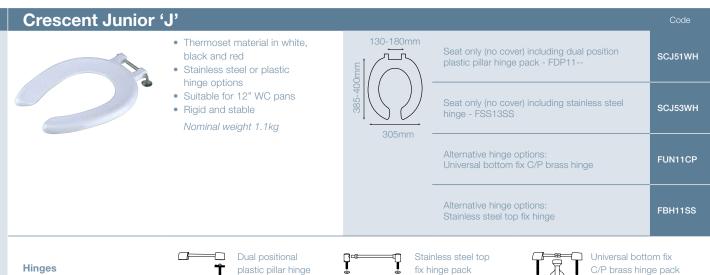

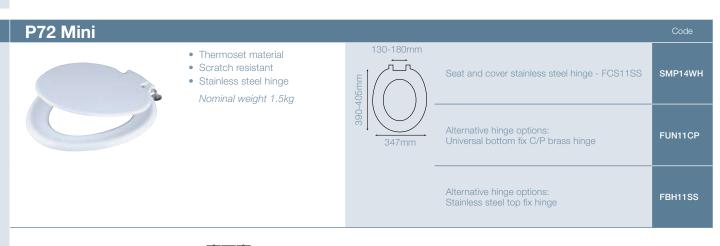

FBH11SS

Hinges

pack FDP11--





FUN11CP





Italian company with UNI EN ISO 9001 certifications, it has been manufacturing and marketing fittings for oil-hydraulics applications since 1952.


State-of-the-art production processes and highly advanced technologies that allow to keep top quality standards characterize the RASTELLI RACCORDI company of today, a recognized leader in the European and extra-European markets

Three pieces straight coupling, M x F, NBR O-RING rubber seal



Leading dimensions

R"	3/8	1/2	3/4	ı	1 1/4	1 1/2	2
L	47	47	52	62	66	76	100




Art 604

Three pieces elbow, M x F, NBR O-RING rubber seal



Leading	ı dime	nsions

R"	3/8	1/2	3/4	ı	1 1/4	1 1/2	2
L	45	50	60	69	80	92	120
Н	20	22	30	33	35	42	68




Art 605

Five ways union




R"	3/8	1/2	3/4	- 1	1 1/4	1 1/2	2
Box	_			10	_		
DOX	-	-	-	10	_	-	-



Art 605L


Five ways union fittings H 60 mm












 $I/2M \times 3/4F$   $3/4M \times IF$ 

Two union tails for water meter with gaskets



Art 615



Two union tails for water meter with gaskets



Art 850



I x I½

11/4 x 2

1½ x 2¼

 $2 \times 23/4$ 

Leading dimensions

 $1/2 \times 1$ 

3/4 x 11/4

R"

LCuui	mg c											
R" X	D	L	BOX	R" X	D	L	ВС	X	R" X	D	L	BOX
3/8	15	58	58	1	25	82	1	5	11/2	40	105	6
1/2	15	58	58	1	30	92	1	0	2	50	125	6
1/2	18	65	65	1	32	95	1	0	2	60	140	5
1/2	20	65	65	11/4	30	93	10	0	21/2	60	135	5
3/4	20	67	67	11/4	32	95	10	0				
3/4	25	69	69	11/4	35	103	8	3				

Three pieces straight "EXCELSIOR" coupling, metal seat



Art 851

Three pieces elbow "EXCELSIOR" coupling, metal seat



Leading dimensions

Leadi	ng a	imensions									
R"X	D	L	BOX	R" X	D	L	BOX	R" X	D	L	BOX
3/8	15	52	20	3/4	25	70	15	11/2	40	100	4
1/2	15	55	20	1	25	75	12	2	50	115	5
1/2	18	60	10	1	30	85	8	2	60	130	3
1/2	20	60	10	11⁄4	30	85	8	21/2	60	125	3
3/4	20	60	10	11/4	95	95	5				



Tube support for pipes S5 class

Art 959A

**Exporting Company Ltd** 



Wall plate female elbow coupling

Leading dimensions

R"	x	D
1/2		20
3/4		25
1		32



Art 957

"T" coupling



Leading dimensions

Leac	ing c	Jillielis
D	x D	x D
20	20	20
25	25	25
32	32	32
40	40	40
50	50	50
63	63	63

Leading dimensions

D	
20	
25	
32	
40	
50	
63	

Art 959B

NBR Brass Ogive, ring and NBR O-RING kit



Female "T" coupling



Leading dimensions

		_	
D	x	R"	x D
20		1/2	20
25		3/4	25
32		1	32
40		11⁄4	40
50		11/2	50
63		2	63

Leading dimensions

D
20
25
32
40
50
63







Male x female hexagonal reducing brass coupling



Leading dimensions

R" X R" BOX

R"	X R"	BOX
M 1/4	F 3/8	30
M 3/8	F 1/2	25
M 1/2	F 3/4	15
M 3/4	F 1	10
M 1	F 11/4	5
M 1¼	F 1½	10
M 1½	F 2	5

## Leading dimensions

20

15

R"	1/2	3/4	1	I 1/4	I ½
R"I	3/8	1/2	3/4	1	1 1/4
L	68	76	80	102	108
D	38	43	49	64	65
DI	45	50	61	65	67

Α.	QL	: 6
Art	0	O

Bottom tank connection inside threaded



Art 964

90° female x female brass elbow



Leading	dimensions

R"	X	R"	вох
1/4		1/4	25
3/8		3/8	25
1/2		1/2	20
3/4		3/4	12
1		1	6
11⁄4		11⁄4	8
11/2		1½	6
2		2	6

Leading dimensions

1 1/4 1 1/2

R"X	R"	BOX
1/4	1/4	40
3/8	3/8	25
1/2	1/2	30
3/4	3/4	20
1	1	12
11⁄4	11⁄4	12
11/2	1½	10
2	2	10

Art 960

Female x female brass coupling



Art 961

Art 965

90° male x female brass elbow



Leading dimensions

	_		
R"	Χ	R"	BOX
1/4		1/4	25
3/8		3/8	25
1/2		1/2	20
3/4		3/4	12
1		1	6
11⁄4		11⁄4	8
11/2		1½	6
2		2	6

Leading dimensions

	_		
R"X	R"	BOX	
-	-	-	
3/8	3/8	40	
1/2	1/2	20	
3/4	3/4	10	
1	1	8	
11⁄4	11⁄4	4	
11/2	1½	6	
2	2	3	

Male x female hexagonal brass

coupling

Art 966

90° female x female brass reducing elbow



Leading dimensions

	9	GIIII C	
R"	Χ	R"	BOX
-		-	-
3/8		1/2	20
1/2		3/4	12
1/2		1	6
3/4		1	6

Leading dimensions

R"X	R"	BOX	
1/4	3/8	30	
3/8	1/2	20	
1/2	3/4	20	
3/4	1	12	
1	11⁄4	8	
11⁄4	1½	4	
11/2	2	5	

Art 962

F x F reducing brass coupling



FITTINGS FOR BLACK POLYETYLENE PIPE WITH BRASS SEAL







## Four ways brass connection



Leading dimensions

R"X	$R" \times R" \times R"$	вох
3/4	1/2 10	10
1	5	

Male x Male reducing double brass nipple



Leading dimensions

R"	Χ	R"	BOX
-		-	-
3/8		1/4	40
1/2		3/8	25
3/4		1/2	15
1		3/4	20
11/4		1	10
11/2		11⁄4	10
2		11/2	6

Art 972

Male x Male double brass nipple



Leading dimensions

R"	Х	R"	BOX
1/4		1/4	50
3/8		3/8	40
1/2		1/2	50
3/4		3/4	30
1		1	15
11⁄4		11⁄4	15
11/2		11/2	10
2		2	6

Art 974

Female brass plug



Leading dimensions

R"	вох
1/4	50
3/8	50
1/2	40
3/4	20
1	15
11⁄4	10
11/2	8
2	6

Art 969

F x F x F brass reducing Tee

Leading dimensions					
R"	X R">	< R"	BOX		
3/4	1/2	3/4	10		
1	3/4	1	5		
11⁄4	1	11⁄4	6		
11/2	11⁄4	11/2	5		
2	11/2	2	6		



Leading dimensions

	9		
R"	X	R"	BOX
M 1,	/2	F 3/4	12
M 3/	/4	F 1	6
N A 1		E 11/	0

Art 967

90° male x female brass reducing elbow



Art 968

Art 970

F x F 3 pieces tapered brass pipe union, metal seat





Leading dimensions
R" X R" X R" BOX

R" >	( R")	< R"	BOX
1/4	1/4	1/4	20
3/8	3/8	3/8	20
1/2	1/2	1/2	15
3/4	3/4	3/4	12
1	1	1	6
11⁄4	11/4	11⁄4	6
11/2	11/2	11/2	5
2	2	2	6

F x F x F brass Tee





Threaded brass connection



	_			
R"	3/8	1/2	3/4	- 1
L	25	30	30	33



Box	50	50	30	20

Leading dimensions

R"	BOX	
1/4	50	
3/8	50	
1/2	40	
3/4	20	
1	15	
11⁄4	10	
11/2	6	
2	5	

Male brass plug



Art 976

Art 975

Art 980

Brass reducing extension M x F



Leading dimensions

	R"	Χ	R"	ВОХ
i	-		-	-
	3/8		1/2	30
	1/2		3/4	15
	3/4		1	10

Leading dimensions
R" X R" BOX
Male x Fer

R"	Х	R"	BOX
3/8		1/4	50
1/2		1/4	30
1/2		3/8	50
3/4		1/2	50
1		3/4	25
11/4		1	15
11/2		11/4	8
2		11/2	4

Male x Female exagonal brass reducer



Art 977
Ghiera in ottone

Ghiera in ottone Brass ring

Art 981

Leading dimensions

Brass extension M x F



R"	L	вох	R"	L	BOX	R"	L	BOX
3/8	12	30	1/2	30	15	3/4	40	10
3/8	15	30	1/2	40	10	3/4	50	10
3/8	20	30	1/2	50	10	1	12	20
3/8	30	20	1/2	60	10	1	15	20
3/8	40	15	1/2	80	10	1	20	15
3/8	50	15	1/2	100	10	1	30	10
1/2	12	25	3/4	12	20	1	40	10
1/2	15	20	3/4	15	15	1	50	10
1/2	20	20	3/4	20	10			
1/2	25	15	3/4	30	10			

Art 982

M x M, threaded brass connection



Art 978

Brass ring with rim

Leading dimensions

Leading dimensions

R"	Х	R"	BOX
	-		-
3/8	-	1/2	50
1/2	-	3/4	50
3/4	-	1	25
1	-	11/4	15
11/4	-	11/2	10





R"	L	вох
1/2	60	15
1/2	80	10
1/2	100	8
1/2	120	8
	4-0	_

R"	L	BOX
3/4	60	10
3/4	80	8
3/4	100	6
3/4	120	6
3/4	150	6

R"	L	BOX
1	60	10
1	80	10
1	100	6
1	120	6
1	150	1



FITTINGS FOR BLACK POLYETYLENE PIPE WITH BRASS SEAL

# **FITTINGS** FOR BLACK POLYETYLENE PIPE WITH BRASS SEAL

Art 953

Elbow coupling

Art 950

Straight coupling



			D >	C D
			20	20
Loadi	مم ط:	mansians	25	25
		mensions	32	32
D x	D		40	40
20	20		50	50
25	25		63	63
32	32			
40	40			
50	50			



Art 954

Male elbow coupling

Art 951

Male straight coupling



Lead	ling di	mensions
R"	x D	
1/2	20	
3/4	25	
1	32	
11⁄4	40	
11/2	50	

63

2

1

11/4

11/2


32

40

50 63

63

63



Leading dimensions



Art 955

Female elbow coupling

Art 952

Female straight coupling



	Leadi	ng di	mensions
	R" :	x D	
	1/2	20	
	3/4	25	
	1	32	
Leading dimensions	11/4	40	
R" x D	11/2	50	
1/2 20	2	63	
3/4 25			







Art 959A

**Exporting Company Ltd** 

Tube support for pipes S5 class



Wall plate female elbow coupling

Leading dimensions

		_	
R"	x	D	
1/2		20	
3/4		25	
1		32	



Art 957

"T" coupling



Leading dimensions

	-	
DD	x D	x D
20	20	20
25	25	25
32	32	32
40	40	40
50	50	50
63	63	63

Leading dimensions

D	
20	
25	
32	
40	
50	
63	

Art 959B

Brass Ogive, ring and NBR O-RING kit



Art 958

Female "T" coupling



Leading dimensions

D	× R"	x D
20	1/2	2 20
25	3/4	4 25
32	1	32
40	11/2	40
50	11/2	50
63	2	63

Leading dimensions

20	
32	
50	









TNJ Pipeclips is a UK based business specialising in the supply of pipe clips and brackets to the plumbing and electrical trade.

Their extensive range includes products made in the following materials Cast Brass, Pressed Brass, Copper, Malleable Iron, Plastic and steel. All brass and copper products are available in self colour or chrome plated.

Code - M3

# **Malleable Iron**

Screw On Brackets			
	S/C	Galv	
1/2"			
3/4"			
1"			
1.1/4"			
1.1/2"			
2"		<b>^</b>	
2.1/2"			
3"			
4"			

S/C = Self Colour Malleable (Black)

Single and Double Rings Tapping is as follows: 1/2" up to 2" = M10 2.1/2" up to 6" = M12

\*\* Special deals available on large quantities of Various sizes of BSP - Please Enquire \*\*

Single Rings M10 & M12	Code - M4	Double Rings M10 & M12	Code - M5
S/C Galv		S/C Galv	
1/2" 3/4" 1" 1.1/4" 1.1/2" 2" 2.1/2" 3" 4" 5" 6"		1/2" 3/4" 1" 1.1/4" 1.1/2" 2" 2.1/2" 3" 4" 5" 6"	
Backplate - Female		Code - M6	

M10 M12



S/C



Galv





## Screw On Brackets

## **Brass**

Code - CB3 Code - PB2 **Cast Brass Pressed Brass** 



76mm 108mm



Brass Chrome

15mm	l.
22mm	ı
28mm	
35mm	
42mm	000000000000000000000000000000000000000
	1-



**Cast Brass Munsen Rings** 

Single Ring	gs - M10
12mm	
15mm	2
22mm	9
28mm	
35mm	

42mm



**Brass** Chrome

54mm 67mm 76mm 108mm 133mm 159mm

Code - HS1

Double Rings - M10

12mm 15mm 22mm 28mm 35mm 42mm



67mm 76mm 108mm 133mm 159mm

Code - HS2

54mm

**Cast Brass Back Plates** 

Female Code - CB10F






**Brass** Chrome

Male



**Brass** Chrome

Code - CB10M





M10 - A

Type B has an extended boss\*

## **Round Base Wall Brackets**

Cast Brass - Short Stem Code - WB6

15mm	
22mm	
28mm	
35mm	
42mm	
54mm	



#### Cast Brass Dual Purpose Code - WB7 (1/4 Bsp)

15mm	
22mm	
28mm	
35mm	
42mm	
54mm	100

1/8"



## **Hospital Brackets & Connecting Tubes**

**Hospital Brackets** Code - HB1

15mm
22mm
28mm
35mm
42mm
54mm



Connecting	Tubes x 2"



HIHICH	
22mm	
28mm	
35mm	
42mm	
54mm	

## Copper

Copper 2 Piece Spacing Clip Code - C2

8 &15mm	
22mm	
28mm	
35mm	1
42mm	
54mm	

6 -12mm
22mm
28mm
35mm
42mm
54mm

Copper Sa	iddle Bands	

Code - C3

Code - Con2

12111111	
22mm	
28mm	
35mm	
42mm	
54mm	







Code - C14

Code - C15

Code - C16

Code - C17

# **Plastic**


Code - C07 **Double Clips** Code - C13

Single Hinged Pipe Clip (Interlocking)

Double Hinged Pipe Clip (Interlocking)

15mm	
22mm	
28mm	







Code - C08





15mm	
22mm	
28mm	



Code - C10

15mm	
22mm	
28mm	



15mm	
22mm	

28mm



Nail Clip Code - C11

7-8mm
10-12mm
15mm
22mm
28mm



Plastic Double Snap Or
------------------------





Slip-On Clip	Code - C12

12.7mm
15.0mm
17.5mm
19.0mm
23.0mm
25.4mm
27.5mm
31.7mm
34.mm
38.1mm
42.mm
42.6mm
44.4mm
48.7mm
53.9mm

60.5mm



## Top Hat Washers

1/2"	
3/4"	



## Polyproplylene Plumbing Washer

1.1/2X7/8"	1/2" Pillar Tap
1.3/4"x1.1/8"	3/4" Pillar Tap
2.1/4"x 1.11/32"	1" Tank Connections
2.3/8"x1.11/16"	1.1/4" Lav Waste
3x1.11/16"	1.1/4" Bath Waste
3.1/4"x1.15/16"	1.1/2" Bath Waste
3.1/2"x1.15/16"	1.1/2 Sink Waste
3.1/2"x1.11/16"	1.1/4" Sink Waste



Code - C18







# **Brass Backnuts / Bushes Etc**

Hex Nipples Taper Thread BSP Code - BN1

1/2"	
3/4"	
1"	



Г



1/2"	
3/4"	
1"	
.1/4"	
•	•



Backnuts BSP	Code -BN2
--------------	-----------

1/2"
3/4"
1"
1.1/4"
1.1/2"
2"



Plugs Square Head BS	SP Code - BN5
3/4"	
Blank Caps BSP	Code - BN6

1/2"	
3/4"	
1"	
1.1/4"	

Plug - BN7 Ring - BN8

Radiator Bleed Valves



Immersion Heater Rings& Plugs Code - BN7/8

#### Reducing Bushes Hex BSP Code - BN3

1/4"x1/8"
3/8"x1/4"
3/8"x1/8"
1/2"x3/8"
1/2"x1/4"
1/2"x1/8"
3/4"x1/2"
1"x3/4"
1"x1/2"
1.1/4"x1"
1.1/4"x3/4"
1.1/4"x1/2"
1.1/2"x1.1/4"
1.1/2"x1"
1.1/2"x3/4"
1.1/2"x1/2"
2"x1.1/2"
2"x1.1/4"

2"x1" 2"x3/4" 2"x1/2"









Code - BN9

Radiator Key	Code - BN10



|--|

1/4" x	M10
3/8" x	M10
3/8" x	M12
1/2" x	M10
1/2" x	M12



## GEORGE LANCASTER (INTERNATIONAL) LIMITED

Float switch and level indicator manufacutrers

George Lancaster (International) Limited have been manufacturing REMEX FLOAT SWITCHES since 1985

REMEX FLOAT SWITCHES are specifically designed for the automatic control of all types of electrically driven pumps, alarm systems and indicators where a rise or fall of any form of liquid is required, or where tanks require automatic emptying or filling.

## Remex Type "B01"

## **Technical Data**

Specifications Liquid Temperature:

0 to 60 degrees C

AC, 10 AMP, 250V Contact Rating:

Switching Differential:

200

1.5 kg

Weight Cable Length Weight of B-01 Float Switch

> 3 m. 0.7 kg

> 5 m. 1.0 kg 10 m.

> 20 m. 2.0 kg



Sodium

Bicarbonate Sodium

## Chemical Resistance

**Acid Solution Acids** Acetic Acid 50% & 70% Boric Acid (5%)

Benzoic Acid Citric Acid Tannic Acid

**Bases** Ammonium Hydroxide Potassium Hydroxide

Sodium Hydroxide Calcium Hydroxide

**Salts** Aluminium Chloride Ferrous Sulphate Sodium Nitrate

> Calcium Sulphate Magnesium Chloride

> Calcium Chloride Potassium Sulphate

Carbonate Calcium Nitrate Potassium Nitrate Zinc Sulphate Copper Chloride Potassium Bicarbonate Zinc Chloride

Copper Sulphate Sodium Sulphate Ferric Chloride Sodium Chloride

Solvents Formaldehyde 37% Methyl Alcohol

Gases Carbon Dioxide Carbon Monoxide Float switch and level indicator manufacutrers



## Remex Type "P"

## **Technical Data**

5 or 10 amp - 220V - 440V - Single Pole Special consideration has been given to the spring movement resulting in exceptional equal balance, the special choice of material for the spindle results in the prevention of any seizing. Minimum liquid variation 1.25" (32mm)

## **Float**

A weight balanced float that can be used in temperatures up to 80 degrees C (158F).

## **Nylon Plated Cord**

A 3 feet (0.9m) is available as standard but longer lengths are available. This is impervious to most liquids and is fixed with a stainless steel spring hook.

## **Stops**

These are adjustable non slip stainless steel spring stops specially designed for the Remex Type "P".

## Weights

A.B.S. thermoplastic encases the weight and counterweight. This is ideally suited for installation where hygiene is a prime requirement.



# Chemical Resistance

Gases

nesistance			
Acids	Acetic Acid 50% & 70%	Boric Acid	Acid Solution (5%)
	Benzoic Acid	Citric Acid	Tannic Acid
Bases	Ammonium Hydroxide Sodium Hydroxide	Potassium Hydroxide Calcium Hydroxide	
Salts	Aluminium Chloride	Ferrous Sulphate	Sodium Nitrate
	Calcium Sulphate	Magnesium Chloride	Sodium Bicarbonate
	Calcium Chloride	Potassium Sulphate	Sodium Carbonate
	Calcium Nitrate	Potassium Nitrate	Zinc Sulphate
	Copper Chloride	Potassium Bicarbonate	Zinc Chloride
	Copper Sulphate	Sodium Sulphate	
	Ferric Chloride	Sodium Chloride	
Solvents	Formaldehyde 37%	Methyl Alcohol	



Carbon Monoxide

Carbon Dioxide





## Remex Type "C"



## Float Equipment

Polythene Float (standard): 5" in diameter, these are injection moulded for liquid temperatures up to 55-60 C. They can be used for weak acids and oils but not suitable for hot detergents.

Copper Float: 5" in diameter, brazed or soldered at the seams. For continuous immersion in boiling water. They are also suitable for certain liquids such as oils or solvents up to 100 degrees C.

Stainless Steel: 5" in diameter also suitable for oils and solvents and hot water and return condensates. The added advantage of such a float is if hygiene is required.

## **Chain Equipment**

A 3 feet (0.9m) length of brass chain is available as standard on all die-cast Remex switches. However longer lengths are available to customers' requirements.

## **Weight Equipment**

Enamelled cast iron weights and counterweights are provided as standard and further weights can be added if required.

## Stop Equipment

Adjustable stainless steel float stops are provided as standard to suit all operations.

## **Rod Equipment**

Copper Rods: 6.3mm in diameter rods are available in lengths 3 - 10 feet (0.9 - 3m) with properly balanced weight to match the counterweight. A rod operation is recommended for use where there is a turbulence or sludge, e.g. septic tanks.

Stainless steel rods: the added security of stainless steel would be suitable for hygiene purposes. Lengths range from 3 - 10 feet (0.9 - 3m).











celmac











The Plumbers' First Choice



"HELDITE"
Jointing Compound

**MONUMENT TOOLS** 

Ph. +44 (0) 1450 860 642 Ph. +44 (0) 208 133 6521

Fax. +44 (0) 1450 860 258

email:

